

Projectors

# JEDI COMPACT



**TARGETTI**

# JEDI

## Compact Outdoor

### GENERAL INFO

Adjustable linear projector.  
Lengths (remote driver):  
312.5mm – 593.5mm –  
873.5mm – 1153.5mm  
Lengths (integrated driver):  
576mm – 856mm –  
1136mm

### LED

Linear boards  
Da 1431lm a 7200lm  
2700K – 3000K – 3500K  
– 4000K  
Ra80

### PRODUCT EFFICACY

Up to 125lm/W

### OPTICS

SP – FL – Grazing –  
Wall Washer

### With Louvre

FL - Grazing - Wall Washer

### POWER SUPPLY

Electronic – DALI  
Casambi control system  
available as an accessory  
(only for DALI versions).

### MATERIAL

Extruded anodised  
aluminium 15μ body. Extra  
clear 5mm thick glass flat  
screen.

### ON DEMAND



Ra90



110-277Vac  
power supply

A compact, high performance linear LED fixture suitable for installation in small grooves or on particularly thin frames. Depending on the chosen optic it is suitable for general lighting in pedestrian areas, vaulted ceilings and vertical surfaces. Available also in a double version with an integrated or remote driver with an extremely thin profile of just 5x4 cm.

If equipped with special brackets the projector can be adjusted up to  $\pm 90^\circ$ .

The L. 300mm version is only available with a remote driver.


The versions with Flood, Grazing and Wall Washer optics can be ordered already equipped with an integrated Louvre grill.

The entire range uses the “Waterblock Smart” technical solution that involves resin coating the connection cables limiting the risk of humidity reaching the driver or the fixture.

Also available recessed version.





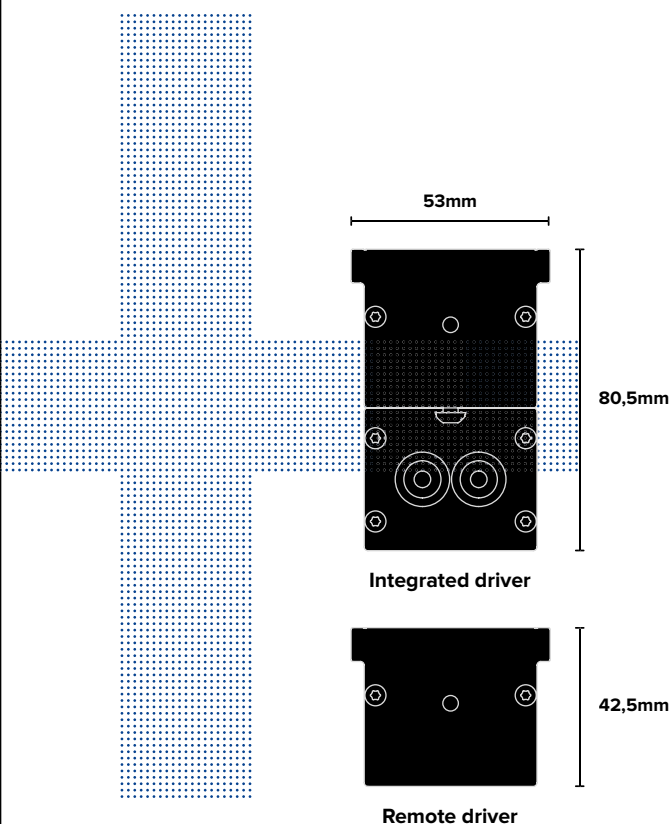


## A Compact size and adjustability

There are two profiles to choose from depending on the characteristics of the installation surface: with a remote driver where it is necessary to have a compact profile, or with an integrated driver when space permits and priority is given to connection speed. Furthermore, thanks to the special brackets that are available in two different lengths, the projector can be rotated from  $-90^{\circ}$  to  $+90^{\circ}$  with aim locking using an Allen key for maximum reliability in the installation phase.

## B Anti-glare multiple effects


The two optical systems - hybrid and lenticular - make it possible to obtain four different luminous effects: grazing light with the grazing optic, soft and uniform light on high and wide surfaces with the wall washer optic and more concentrated effects with flood and spot optics. The versions with Flood, Grazing and Wall Washer optics can be ordered already equipped with an integrated Louvre grill and longitudinal blades to control lateral emission and reduce the risk of glare.

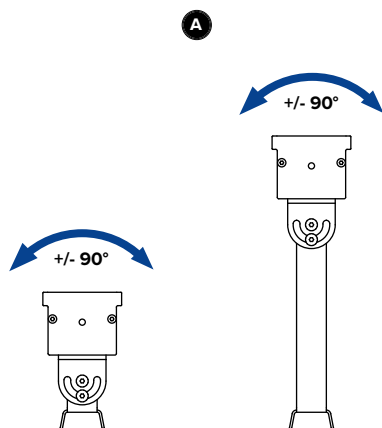

# JEDI COMPACT



## Outdoor Projector Remote driver L. 312,5mm



### LED / 12W / SPOT



	3000K	H(m)	D(m)	E <sub>max</sub> (lx)
Ra80			11°	
Fixture Power	12W	1	0.20	19792
Source Flux	1554lm	2	0.40	4948
Fixture Flux	1288lm	3	0.59	2199
Efficacy	107lm/W	4	0.79	1237
TS1340	I <sub>max</sub> =12736cd/klm	I <sub>max</sub>	19792cd	5 0.99 792

Power supply	Colour	2700K	3000K	3500K	4000K
500mA	●	<b>1E3807</b>	<b>1E3808</b>	<b>1E3809</b>	<b>1E3810</b>

### LED / 12W / FLOOD



	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)
Ra80			85°	32°	
Fixture Power	12W	1	1.84	0.57	1203
Source Flux	1720lm	2	3.68	1.14	301
Fixture Flux	1285lm	3	5.52	1.70	134
Efficacy	107lm/W	4	7.36	2.27	75
TS1084	I <sub>max</sub> =699cd/klm	I <sub>max</sub>	1203cd	5 9.20 2.84 48	

Power supply	Colour	2700K	3000K	3500K	4000K
500mA	●	<b>1E3220</b>	<b>1E3221</b>	<b>1E3222</b>	<b>1E3223</b>

### LED / 12W / GRAZING



	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)
Ra80			76°	15°	
Fixture Power	12W	1	1.55	0.26	2752
Source Flux	1720lm	2	3.10	0.51	688
Fixture Flux	1429lm	3	4.65	0.77	306
Efficacy	119lm/W	4	6.21	1.02	172
TS1088	I <sub>max</sub> =1600cd/klm	I <sub>max</sub>	2752cd	5 7.76 1.28 110	

Power supply	Colour	2700K	3000K	3500K	4000K
500mA	●	<b>1E3224</b>	<b>1E3225</b>	<b>1E3226</b>	<b>1E3227</b>

### LED / 12W / WALL WASHER




	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)
Ra80			115°	59°	
Fixture Power	12W	1	3.12	1.34	1156
Source Flux	1720lm	2	6.23	2.67	289
Fixture Flux	1293lm	3	9.35	4.01	128
Efficacy	108lm/W	4	12.47	5.35	72
TS1092	I <sub>max</sub> =774cd/klm	I <sub>max</sub>	1331cd	5 15.59 6.69 46	

Power supply	Colour	2700K	3000K	3500K	4000K
500mA	●	<b>1E3228</b>	<b>1E3229</b>	<b>1E3230</b>	<b>1E3231</b>

# JEDI COMPACT



## Outdoor Projector Remote driver L. 593,5mm



### LED / 23W / SPOT



	3000K	H(m)	D(m)	E <sub>max</sub> (lx)
Ra80			11°	
Fixture Power	23W	1	0.20	38437
Source Flux	3018lm	2	0.40	9609
Fixture Flux	2501lm	3	0.59	4271
Efficacy	109lm/W	4	0.79	2402
TS1340	Imax=12736cd/klm	Imax	38437cd	5 0.99 1537

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		<b>1E3811</b>	<b>1E3812</b>	<b>1E3813</b>	<b>1E3814</b>

### LED / 24W / FLOOD



	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)
Ra80			85°	32°	
Fixture Power	24W	1	1.84	0.57	2406
Source Flux	3440lm	2	3.68	1.14	601
Fixture Flux	2570lm	3	5.52	1.70	267
Efficacy	107lm/W	4	7.36	2.27	150
TS1084	Imax=699cd/klm	Imax	2406cd	5 9.20 2.84 96	

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		<b>1E3232</b>	<b>1E3233</b>	<b>1E3234</b>	<b>1E3235</b>

### LED / 24W / GRAZING



	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)
Ra80			76°	15°	
Fixture Power	24W	1	1.55	0.26	5505
Source Flux	3440lm	2	3.10	0.51	1376
Fixture Flux	2858lm	3	4.65	0.77	612
Efficacy	119lm/W	4	6.21	1.02	344
TS1088	Imax=1600cd/klm	Imax	5505cd	5 7.76 1.28 220	

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		<b>1E3236</b>	<b>1E3237</b>	<b>1E3238</b>	<b>1E3239</b>

### LED / 24W / WALL WASHER




	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)
Ra80			115°	59°	
Fixture Power	24W	1	3.12	1.34	2312
Source Flux	3440lm	2	6.23	2.67	578
Fixture Flux	2586lm	3	9.35	4.01	257
Efficacy	108lm/W	4	12.47	5.35	145
TS1092	Imax=774cd/klm	Imax	2661cd	5 15.59 6.69 92	

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		<b>1E3240</b>	<b>1E3241</b>	<b>1E3242</b>	<b>1E3243</b>

# JEDI COMPACT



## Outdoor Projector Remote driver L. 873,5mm



### LED / 35W / SPOT



	3000K	H(m)	D(m)	E <sub>max</sub> (lx)
Ra80			11°	
Fixture Power	35W	1	0.20	59376
Source Flux	4662lm	2	0.40	14844
Fixture Flux	3863lm	3	0.59	6597
Efficacy	110lm/W	4	0.79	3711
TS1340	I <sub>max</sub> =12736cd/klm	I <sub>max</sub>	59376cd	2375

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		<b>1E3815</b>	<b>1E3816</b>	<b>1E3817</b>	<b>1E3818</b>

### LED / 36W / FLOOD



	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)
Ra80			85°	32°	
Fixture Power	36W	1	1.84	0.57	3609
Source Flux	5160lm	2	3.68	1.14	902
Fixture Flux	3856lm	3	5.52	1.70	401
Efficacy	107lm/W	4	7.36	2.27	226
TS1085	I <sub>max</sub> =699cd/klm	I <sub>max</sub>	3609cd	5 9.20 2.84	144

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		<b>1E3244</b>	<b>1E3245</b>	<b>1E3246</b>	<b>1E3247</b>

### LED / 36W / GRAZING



	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)
Ra80			76°	15°	
Fixture Power	36W	1	1.55	0.26	8259
Source Flux	5160lm	2	3.10	0.51	2065
Fixture Flux	4288lm	3	4.65	0.77	918
Efficacy	119lm/W	4	6.21	1.02	516
TS1089	I <sub>max</sub> =1601cd/klm	I <sub>max</sub>	8259cd	5 7.76 1.28	330

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		<b>1E3248</b>	<b>1E3249</b>	<b>1E3250</b>	<b>1E3251</b>

### LED / 36W / WALL WASHER




	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)
Ra80			115°	59°	
Fixture Power	36W	1	3.12	1.34	3468
Source Flux	5160lm	2	6.23	2.67	867
Fixture Flux	3879lm	3	9.35	4.01	385
Efficacy	108lm/W	4	12.47	5.35	217
TS1093	I <sub>max</sub> =774cd/klm	I <sub>max</sub>	3992cd	5 15.59 6.69	139

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		<b>1E3252</b>	<b>1E3253</b>	<b>1E3254</b>	<b>1E3255</b>

# JEDI COMPACT



## Outdoor Projector Remote driver L. 1153,5mm



### LED / 46W / SPOT



3000K	H(m)	D(m)	Emax(lx)
Ra80		11°	
Fixture Power	46W	1	0.20 79167
Source Flux	6216lm	2	0.40 19792
Fixture Flux	5151lm	3	0.59 8796
Efficacy	112lm/W	4	0.79 4948
Imax	79167cd	5	0.99 3167

TS1340 Imax=12736cd/klm

Power supply	Colour	2700K	3000K	3500K	4000K
500mA	●	<b>1E3819</b>	<b>1E3820</b>	<b>1E3821</b>	<b>1E3822</b>

### LED / 48W / FLOOD



3000K	H(m)	D1(m)	D2(m)	Emax(lx)
Ra80		85°	32°	
Fixture Power	48W	1	1.84	0.57 4812
Source Flux	6880lm	2	3.68	1.14 1203
Fixture Flux	5141lm	3	5.52	1.70 535
Efficacy	107lm/W	4	7.36	2.27 301
Imax	4812cd	5	9.20	2.84 192

TS1085 Imax=699cd/klm

Power supply	Colour	2700K	3000K	3500K	4000K
500mA	●	<b>1E3256</b>	<b>1E3257</b>	<b>1E3258</b>	<b>1E3259</b>

### LED / 48W / GRAZING



3000K	H(m)	D1(m)	D2(m)	Emax(lx)
Ra80		76°	15°	
Fixture Power	48W	1	1.55	0.26 11012
Source Flux	6880lm	2	3.10	0.51 2753
Fixture Flux	5717lm	3	4.65	0.77 1224
Efficacy	119lm/W	4	6.21	1.02 688
Imax	11012cd	5	7.76	1.28 440

TS1089 Imax=1601cd/klm

Power supply	Colour	2700K	3000K	3500K	4000K
500mA	●	<b>1E3260</b>	<b>1E3261</b>	<b>1E3262</b>	<b>1E3263</b>

### LED / 48W / WALL WASHER



3000K	H(m)	D1(m)	D2(m)	Emax(lx)
Ra80		115°	59°	
Fixture Power	48W	1	3.12	1.34 4624
Source Flux	6880lm	2	6.23	2.67 1156
Fixture Flux	5172lm	3	9.35	4.01 514
Efficacy	108lm/W	4	12.47	5.35 289
Imax	5322cd	5	15.59	6.69 185

TS1093 Imax=774cd/klm


Power supply	Colour	2700K	3000K	3500K	4000K
500mA	●	<b>1E3264</b>	<b>1E3265</b>	<b>1E3266</b>	<b>1E3267</b>



# JEDI COMPACT



## Outdoor Projector Louvre Remote driver L. 312,5mm



### LED / 12W / FLOOD



	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)
Ra80			86°	29°	
Fixture Power	12W	1	1.86	0.52	873
Source Flux	1720lm	2	3.71	1.05	218
Fixture Flux	752lm	3	5.57	1.57	97
Efficacy	63lm/W	4	7.42	2.09	55
TS1086	I <sub>max</sub> =508cd/klm	I <sub>max</sub>	873cd	5	9.28
			2.62	35	

Power supply	Colour	2700K	3000K	3500K	4000K
500mA	●	<b>1E3307</b>	<b>1E3308</b>	<b>1E3309</b>	<b>1E3310</b>

### LED / 12W / GRAZING



	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)
Ra80			80°	13°	
Fixture Power	12W	1	1.68	0.23	1903
Source Flux	1720lm	2	3.36	0.46	476
Fixture Flux	912lm	3	5.04	0.68	211
Efficacy	76lm/W	4	6.72	0.91	119
TS1090	I <sub>max</sub> =1106cd/klm	I <sub>max</sub>	1903cd	5	8.40
			1.14	76	

Power supply	Colour	2700K	3000K	3500K	4000K
500mA	●	<b>1E3311</b>	<b>1E3312</b>	<b>1E3313</b>	<b>1E3314</b>

### LED / 12W / WALL WASHER




	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)
Ra80			116°	62°	
Fixture Power	12W	1	3.17	1.49	960
Source Flux	1720lm	2	6.35	2.97	240
Fixture Flux	975lm	3	9.52	4.46	107
Efficacy	81lm/W	4	12.70	5.95	60
TS1094	I <sub>max</sub> =671cd/klm	I <sub>max</sub>	1153cd	5	15.87
			7.43	38	

Power supply	Colour	2700K	3000K	3500K	4000K
500mA	●	<b>1E3315</b>	<b>1E3316</b>	<b>1E3317</b>	<b>1E3318</b>



## Outdoor Projector Louvre Remote driver L. 593,5mm



### LED / 24W / FLOOD



	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)
Ra80			86°	29°	
Fixture Power	24W	1	1.86	0.52	1747
Source Flux	3440lm	2	3.71	1.05	437
Fixture Flux	1503lm	3	5.57	1.57	194
Efficacy	63lm/W	4	7.42	2.09	109
TS1086	I <sub>max</sub> =508cd/klm	I <sub>max</sub>	1747cd	5	9.28
			2.62	70	

Power supply	Colour	2700K	3000K	3500K	4000K
500mA	●	<b>1E3319</b>	<b>1E3320</b>	<b>1E3321</b>	<b>1E3322</b>

# JEDI COMPACT

## LED / 24W / GRAZING



	3000K	H(m)	D1(m)	D2(m)	Emax(lx)
Ra80		80°	13°		
Fixture Power	24W	1	1.68	0.23	3805
Source Flux	3440lm	2	3.36	0.46	951
Fixture Flux	1824lm	3	5.04	0.68	423
Efficacy	76lm/W	4	6.72	0.91	238
TS1090	Imax=1106cd/klm	Imax	5	8.40	1.14 152

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		<b>1E3323</b>	<b>1E3324</b>	<b>1E3325</b>	<b>1E3326</b>

## LED / 24W / WALL WASHER




	3000K	H(m)	D1(m)	D2(m)	Emax(lx)
Ra80		116°	62°		
Fixture Power	24W	1	3.17	1.49	1919
Source Flux	3440lm	2	6.35	2.97	480
Fixture Flux	1950lm	3	9.52	4.46	213
Efficacy	81lm/W	4	12.70	5.95	120
TS1094	Imax=671cd/klm	Imax	5	15.87	7.43 77

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		<b>1E3327</b>	<b>1E3328</b>	<b>1E3329</b>	<b>1E3330</b>



## Outdoor Projector Louvre Remote driver L. 873,5mm



## LED / 36W / FLOOD



	3000K	H(m)	D1(m)	D2(m)	Emax(lx)
Ra80		86°	29°		
Fixture Power	36W	1	1.86	0.52	2620
Source Flux	5160lm	2	3.71	1.05	655
Fixture Flux	2255lm	3	5.57	1.57	291
Efficacy	63lm/W	4	7.42	2.09	164
TS1087	Imax=508cd/klm	Imax	5	9.28	2.62 105

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		<b>1E3331</b>	<b>1E3332</b>	<b>1E3333</b>	<b>1E3334</b>

## LED / 36W / GRAZING



	3000K	H(m)	D1(m)	D2(m)	Emax(lx)
Ra80		80°	13°		
Fixture Power	36W	1	1.68	0.23	5707
Source Flux	5160lm	2	3.36	0.46	1427
Fixture Flux	2735lm	3	5.04	0.68	634
Efficacy	76lm/W	4	6.72	0.91	357
TS1091	Imax=1106cd/klm	Imax	5	8.40	1.14 228

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		<b>1E3335</b>	<b>1E3336</b>	<b>1E3337</b>	<b>1E3338</b>

## LED / 36W / WALL WASHER




	3000K	H(m)	D1(m)	D2(m)	Emax(lx)
Ra80		116°	62°		
Fixture Power	36W	1	3.17	1.49	2879
Source Flux	5160lm	2	6.35	2.97	720
Fixture Flux	2926lm	3	9.52	4.46	320
Efficacy	81lm/W	4	12.70	5.95	180
TS1095	Imax=671cd/klm	Imax	5	15.87	7.43 115

Power supply	Colour	2700K	3000K	3500K	4000K
500mA		<b>1E3339</b>	<b>1E3340</b>	<b>1E3341</b>	<b>1E3342</b>

# JEDI COMPACT



## Outdoor Projector Louvre Remote driver L. 1153,5mm



### LED / 48W / FLOOD



	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)	
	Ra80		86°	29°		
	Fixture Power	48W	1	1.86	0.52	3494
	Source Flux	6880lm	2	3.71	1.05	873
	Fixture Flux	3007lm	3	5.57	1.57	388
	Efficacy	63lm/W	4	7.42	2.09	218
	TS1087	I <sub>max</sub> =508cd/klm	I <sub>max</sub>	5	9.28	2.62

Power supply	Colour	2700K	3000K	3500K	4000K
500mA	●	<b>1E3343</b>	<b>1E3344</b>	<b>1E3345</b>	<b>1E3346</b>

### LED / 48W / GRAZING



	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)	
	Ra80		80°	13°		
	Fixture Power	48W	1	1.68	0.23	7609
	Source Flux	6880lm	2	3.36	0.46	1902
	Fixture Flux	3646lm	3	5.04	0.68	845
	Efficacy	76lm/W	4	6.72	0.91	476
	TS1091 I <sub>max</sub> =1106cd/klm	I <sub>max</sub>	5	8.40	1.14	304

Power supply	Colour	2700K	3000K	3500K	4000K
500mA	●	<b>1E3347</b>	<b>1E3348</b>	<b>1E3349</b>	<b>1E3350</b>

### LED / 48W / WALL WASHER




	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)	
	Ra80		116°	62°		
	Fixture Power	48W	1	3.17	1.49	3838
	Source Flux	6880lm	2	6.35	2.97	960
	Fixture Flux	3901lm	3	9.52	4.46	426
	Efficacy	81lm/W	4	12.70	5.95	240
	TS1095	I <sub>max</sub> =671cd/klm	I <sub>max</sub>	5	15.87	7.43


Power supply	Colour	2700K	3000K	3500K	4000K
500mA	●	<b>1E3351</b>	<b>1E3352</b>	<b>1E3353</b>	<b>1E3354</b>



## Outdoor Projector Integrated driver L. 576mm



### LED / 23W / SPOT



	3000K	H(m)	D(m)	E <sub>max</sub> (lx)	
	Ra80		11°		
	Fixture Power	26W	1	0.20	39584
	Source Flux	3108lm	2	0.40	9896
	Fixture Flux	2575lm	3	0.59	4398
	Efficacy	99lm/W	4	0.79	2474
	TS1340 Imax=12736cd/klm	Imax	39584cd	5	0.99

Driver	Colour	2700K	3000K	3500K	4000K
EL	●	<b>1E3823EL</b>	<b>1E3824EL</b>	<b>1E3825EL</b>	<b>1E3826EL</b>
DALI	●	<b>1E3823DA</b>	<b>1E3824DA</b>	<b>1E3825DA</b>	<b>1E3826DA</b>

# JEDI COMPACT

## LED / 24W / FLOOD



	3000K	H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			85°	32°	
Fixture Power	28W	1	1.84	0.57	2406
Source Flux	3440lm	2	3.68	1.14	601
Fixture Flux	2570lm	3	5.52	1.70	267
Efficacy	92lm/W	4	7.36	2.27	150
TS1084	Imax=699cd/klm	Imax	2406cd	5	9.20
			2.84	96	

Driver	Colour	2700K	3000K	3500K	4000K
EL.		<b>1E3268EL</b>	<b>1E3269EL</b>	<b>1E3270EL</b>	<b>1E3271EL</b>
DALI		<b>1E3268DA</b>	<b>1E3269DA</b>	<b>1E3270DA</b>	<b>1E3271DA</b>

## LED / 24W / GRAZING



	3000K	H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			76°	15°	
Fixture Power	28W	1	1.55	0.26	5505
Source Flux	3440lm	2	3.10	0.51	1376
Fixture Flux	2858lm	3	4.65	0.77	612
Efficacy	102lm/W	4	6.21	1.02	344
TS1088	Imax=1600cd/klm	Imax	5505cd	5	7.76
			1.28	220	

Driver	Colour	2700K	3000K	3500K	4000K
EL.		<b>1E3272EL</b>	<b>1E3273EL</b>	<b>1E3274EL</b>	<b>1E3275EL</b>
DALI		<b>1E3272DA</b>	<b>1E3273DA</b>	<b>1E3274DA</b>	<b>1E3275DA</b>

## LED / 24W / WALL WASHER




	3000K	H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			28°	78°	
Fixture Power	28W	1	0.55	1.70	2310
Source Flux	3440lm	2	1.11	3.40	577
Fixture Flux	2586lm	3	1.66	5.10	257
Efficacy	92lm/W	4	2.22	6.79	144
TS1092	Imax=774cd/klm	Imax	2661cd	5	2.77
			8.49	92	


Driver	Colour	2700K	3000K	3500K	4000K
EL.		<b>1E3276EL</b>	<b>1E3277EL</b>	<b>1E3278EL</b>	<b>1E3279EL</b>
DALI		<b>1E3276DA</b>	<b>1E3277DA</b>	<b>1E3278DA</b>	<b>1E3279DA</b>



## Outdoor Projector Integrated driver L. 856mm



## LED / 35W / SPOT



	3000K	H(m)	D(m)	Emax(lx)		
	Ra80		11°			
	Fixture Power	38W	1	0.20	59376	
	Source Flux	4662lm	2	0.40	14844	
	Fixture Flux	3863lm	3	0.59	6597	
	Efficacy	102lm/W	4	0.79	3711	
	TS1340	Imax=12736cd/klm	Imax	59376cd	5	0.99

Driver	Colour	2700K	3000K	3500K	4000K
EL.		<b>1E3827EL</b>	<b>1E3828EL</b>	<b>1E3829EL</b>	<b>1E3830EL</b>
DALI		<b>1E3827DA</b>	<b>1E3828DA</b>	<b>1E3829DA</b>	<b>1E3830DA</b>

## LED / 36W / FLOOD



	3000K	H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			85°	32°	
Fixture Power	40W	1	1.84	0.57	3609
Source Flux	5160lm	2	3.68	1.14	902
Fixture Flux	3856lm	3	5.52	1.70	401
Efficacy	96lm/W	4	7.36	2.27	226
TS1085	Imax=699cd/klm	Imax	3609cd	5	9.20
			2.84	144	

Driver	Colour	2700K	3000K	3500K	4000K
EL.		<b>1E3280EL</b>	<b>1E3281EL</b>	<b>1E3282EL</b>	<b>1E3283EL</b>
DALI		<b>1E3280DA</b>	<b>1E3281DA</b>	<b>1E3282DA</b>	<b>1E3283DA</b>

# JEDI COMPACT

## LED / 36W / GRAZING



	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)
Ra80			76°	15°	
Fixture Power	40W	1	1.55	0.26	8259
Source Flux	5160lm	2	3.10	0.51	2065
Fixture Flux	4288lm	3	4.65	0.77	918
Efficacy	107lm/W	4	6.21	1.02	516
TS1089	I <sub>max</sub> =1601cd/klm	I <sub>max</sub>	8259cd	5	7.76
			1.28	330	

Driver	Colour	2700K	3000K	3500K	4000K
EL.	●	<b>1E3284EL</b>	<b>1E3285EL</b>	<b>1E3286EL</b>	<b>1E3287EL</b>
DALI	●	<b>1E3284DA</b>	<b>1E3285DA</b>	<b>1E3286DA</b>	<b>1E3287DA</b>

## LED / 36W / WALL WASHER




	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)
Ra80			28°	78°	
Fixture Power	40W	1	0.55	1.70	3465
Source Flux	5160lm	2	1.11	3.40	866
Fixture Flux	3880lm	3	1.66	5.10	385
Efficacy	97lm/W	4	2.22	6.79	217
TS1093	I <sub>max</sub> =774cd/klm	I <sub>max</sub>	3992cd	5	2.77
			8.49	139	

Driver	Colour	2700K	3000K	3500K	4000K
EL.	●	<b>1E3288EL</b>	<b>1E3289EL</b>	<b>1E3290EL</b>	<b>1E3291EL</b>
DALI	●	<b>1E3288DA</b>	<b>1E3289DA</b>	<b>1E3290DA</b>	<b>1E3291DA</b>



**Outdoor Projector  
Integrated driver  
L. 1136mm**



## LED / 46W / SPOT



	3000K	H(m)	D(m)	E <sub>max</sub> (lx)		
	Ra80		11°			
	Fixture Power	51W	1	0.20	79167	
	Source Flux	6216lm	2	0.40	19792	
	Fixture Flux	5151lm	3	0.59	8796	
	Efficacy	101lm/W	4	0.79	4948	
	TS1340	Imax=12736cd/klm	Imax	79167cd	5	0.99

Driver	Colour	2700K	3000K	3500K	4000K
EL.	●	<b>1E3831EL</b>	<b>1E3832EL</b>	<b>1E3833EL</b>	<b>1E3834EL</b>
DALI	●	<b>1E3831DA</b>	<b>1E3832DA</b>	<b>1E3833DA</b>	<b>1E3834DA</b>

## LED / 48W / FLOOD



	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)
Ra80			85°	32°	
Fixture Power	53W	1	1.84	0.57	4812
Source Flux	6880lm	2	3.68	1.14	1203
Fixture Flux	5141lm	3	5.52	1.70	535
Efficacy	97lm/W	4	7.36	2.27	301
TS1085	I <sub>max</sub> =699cd/klm	I <sub>max</sub>	4812cd	5	9.20
			2.84	192	

Driver	Colour	2700K	3000K	3500K	4000K
EL.	●	<b>1E3292EL</b>	<b>1E3293EL</b>	<b>1E3294EL</b>	<b>1E3295EL</b>
DALI	●	<b>1E3292DA</b>	<b>1E3293DA</b>	<b>1E3294DA</b>	<b>1E3295DA</b>

## LED / 48W / GRAZING



	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)
Ra80			76°	15°	
Fixture Power	53W	1	1.55	0.26	11012
Source Flux	6880lm	2	3.10	0.51	2753
Fixture Flux	5717lm	3	4.65	0.77	1224
Efficacy	108lm/W	4	6.21	1.02	688
TS1089	I <sub>max</sub> =1601cd/klm	I <sub>max</sub>	11012cd	5	7.76
			1.28	440	

Driver	Colour	2700K	3000K	3500K	4000K
EL.	●	<b>1E3296EL</b>	<b>1E3297EL</b>	<b>1E3298EL</b>	<b>1E3299EL</b>
DALI	●	<b>1E3296DA</b>	<b>1E3297DA</b>	<b>1E3298DA</b>	<b>1E3299DA</b>

# JEDI COMPACT

## LED / 48W / WALL WASHER




	3000K	H(m)	D1(m)	D2(m)	Emax(lx)
Ra80		28°	78°		
Fixture Power	53W	1	0.55	1.70	4620
Source Flux	6880lm	2	1.11	3.40	1155
Fixture Flux	5173lm	3	1.66	5.10	513
Efficacy	98lm/W	4	2.22	6.79	289
TS1093	Imax=774cd/klm	Imax	5323cd	5	2.77 8.49 185

Driver	Colour	2700K	3000K	3500K	4000K
EL.		<b>1E3300EL</b>	<b>1E3301EL</b>	<b>1E3302EL</b>	<b>1E3303EL</b>
DALI		<b>1E3300DA</b>	<b>1E3301DA</b>	<b>1E3302DA</b>	<b>1E3303DA</b>



## Outdoor Projector Louvre Integrated driver L. 576mm



## LED / 24W / FLOOD



	3000K	H(m)	D1(m)	D2(m)	Emax(lx)
Ra80		86°	29°		
Fixture Power	28W	1	1.86	0.52	1747
Source Flux	3440lm	2	3.71	1.05	437
Fixture Flux	1503lm	3	5.57	1.57	194
Efficacy	54lm/W	4	7.42	2.09	109
TS1086	Imax=508cd/klm	Imax	1747cd	5	9.28 2.62 70

Driver	Colour	2700K	3000K	3500K	4000K
EL.		<b>1E3355EL</b>	<b>1E3356EL</b>	<b>1E3357EL</b>	<b>1E3358EL</b>
DALI		<b>1E3355DA</b>	<b>1E3356DA</b>	<b>1E3357DA</b>	<b>1E3358DA</b>


## LED / 24W / GRAZING



	3000K	H(m)	D1(m)	D2(m)	Emax(lx)
Ra80		80°	13°		
Fixture Power	28W	1	1.68	0.23	3805
Source Flux	3440lm	2	3.36	0.46	951
Fixture Flux	1824lm	3	5.04	0.68	423
Efficacy	65lm/W	4	6.72	0.91	238
TS1090	Imax=1106cd/klm	Imax	3805cd	5	8.40 1.14 152

Driver	Colour	2700K	3000K	3500K	4000K
EL.		<b>1E3359EL</b>	<b>1E3360EL</b>	<b>1E3361EL</b>	<b>1E3362EL</b>
DALI		<b>1E3359DA</b>	<b>1E3360DA</b>	<b>1E3361DA</b>	<b>1E3362DA</b>

## LED / 24W / WALL WASHER




	3000K	H(m)	D1(m)	D2(m)	Emax(lx)
Ra80		29°	75°		
Fixture Power	28W	1	0.61	1.65	1918
Source Flux	3440lm	2	1.22	3.30	479
Fixture Flux	1950lm	3	1.82	4.94	213
Efficacy	70lm/W	4	2.43	6.59	120
TS1094	Imax=671cd/klm	Imax	2307cd	5	3.04 8.24 77

Driver	Colour	2700K	3000K	3500K	4000K
EL.		<b>1E3363EL</b>	<b>1E3364EL</b>	<b>1E3365EL</b>	<b>1E3366EL</b>
DALI		<b>1E3363DA</b>	<b>1E3364DA</b>	<b>1E3365DA</b>	<b>1E3366DA</b>

# JEDI COMPACT



## Outdoor Projector Louvre Integrated driver L. 856mm



### LED / 36W / FLOOD



	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)	
	Ra80		86°	29°		
	Fixture Power	40W	1	1.86	0.52	2620
	Source Flux	5160lm	2	3.71	1.05	655
	Fixture Flux	2255lm	3	5.57	1.57	291
	Efficacy	56lm/W	4	7.42	2.09	164
	TS1087	I <sub>max</sub> =508cd/klm	I <sub>max</sub>	5	9.28	2.62

Driver	Colour	2700K	3000K	3500K	4000K
EL.	●	<b>1E3367EL</b>	<b>1E3368EL</b>	<b>1E3369EL</b>	<b>1E3370EL</b>
DALI	●	<b>1E3367DA</b>	<b>1E3368DA</b>	<b>1E3369DA</b>	<b>1E3370DA</b>

### LED / 36W / GRAZING



	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)	
	Ra80		80°	13°		
	Fixture Power	40W	1	1.68	0.23	5707
	Source Flux	5160lm	2	3.36	0.46	1427
	Fixture Flux	2735lm	3	5.04	0.68	634
	Efficacy	68lm/W	4	6.72	0.91	357
	TS1091	I <sub>max</sub> =1106cd/klm	I <sub>max</sub>	5	8.40	1.14

Driver	Colour	2700K	3000K	3500K	4000K
EL.	●	<b>1E3371EL</b>	<b>1E3372EL</b>	<b>1E3373EL</b>	<b>1E3374EL</b>
DALI	●	<b>1E3371DA</b>	<b>1E3372DA</b>	<b>1E3373DA</b>	<b>1E3374DA</b>

### LED / 36W / WALL WASHER




 <p>Diagram showing light distribution with beam spread and footcandle readings. The diagram includes a circular beam with a central spot and a larger outer area. Footcandle readings are indicated at various distances: 100, 300, 600, and 900. The beam spread is marked with angles of 29° and 75°. The diagram also shows a grid with coordinates (0, 300, 600, 900) and a scale of 1000.</p>	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)	
	Ra80		29°	75°		
	Fixture Power	40W	1	0.61	1.65	2876
	Source Flux	5160lm	2	1.22	3.30	719
	Fixture Flux	2926lm	3	1.82	4.94	320
	Efficacy	73lm/W	4	2.43	6.59	180
	TS1095	I <sub>max</sub> =671cd/klm	I <sub>max</sub>	5	3.04	8.24


Driver	Colour	2700K	3000K	3500K	4000K
EL.	●	<b>1E3375EL</b>	<b>1E3376EL</b>	<b>1E3377EL</b>	<b>1E3378EL</b>
DALI	●	<b>1E3375DA</b>	<b>1E3376DA</b>	<b>1E3377DA</b>	<b>1E3378DA</b>



## Outdoor Projector Louvre Integrated driver L. 1136mm



### LED / 48W / FLOOD



	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)	
	Ra80		86°	29°		
	Fixture Power	53W	1	1.86	0.52	3494
	Source Flux	6880lm	2	3.71	1.05	873
	Fixture Flux	3007lm	3	5.57	1.57	388
	Efficacy	57lm/W	4	7.42	2.09	218
	TS1087	I <sub>max</sub> =508cd/klm	I <sub>max</sub>	5	9.28	2.62

Driver	Colour	2700K	3000K	3500K	4000K
EL.	●	<b>1E3379EL</b>	<b>1E3380EL</b>	<b>1E3381EL</b>	<b>1E3382EL</b>
DALI	●	<b>1E3379DA</b>	<b>1E3380DA</b>	<b>1E3381DA</b>	<b>1E3382DA</b>



# JEDI COMPACT

## LED / 48W / GRAZING



	3000K	H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			80°	13°	
Fixture Power	53W	1	1.68	0.23	7609
Source Flux	6880lm	2	3.36	0.46	1902
Fixture Flux	3646lm	3	5.04	0.68	845
Efficacy	69lm/W	4	6.72	0.91	476
TS1091	Imax=1106cd/klm	Imax	5	8.40	1.14 304

Driver	Colour	2700K	3000K	3500K	4000K
EL.		<b>1E3383EL</b>	<b>1E3384EL</b>	<b>1E3385EL</b>	<b>1E3386EL</b>
DALI		<b>1E3383DA</b>	<b>1E3384DA</b>	<b>1E3385DA</b>	<b>1E3386DA</b>

## LED / 48W / WALL WASHER



	3000K	H(m)	D1(m)	D2(m)	Emax(lx)
Ra80			29°	75°	
Fixture Power	53W	1	0.61	1.65	3835
Source Flux	6880lm	2	1.22	3.30	959
Fixture Flux	3901lm	3	1.82	4.94	426
Efficacy	74lm/W	4	2.43	6.59	240
TS1095	Imax=671cd/klm	Imax	5	3.04	8.24 153


Driver	Colour	2700K	3000K	3500K	4000K
EL.		<b>1E3387EL</b>	<b>1E3388EL</b>	<b>1E3389EL</b>	<b>1E3390EL</b>
DALI		<b>1E3387DA</b>	<b>1E3388DA</b>	<b>1E3389DA</b>	<b>1E3390DA</b>

## Note

Remote driver version: values relating to the power of the fixture do not take into account the absorption of the accessory driver. This value depends on the choice of driver.

## Related codes


### Bracket



Code

**1E3304**

Stainless steel short bracket kit for surface installation (2 pieces).  
Rotation +/-90°.



Code

**1E3306**

Stainless steel long bracket kit for surface installation (2 pieces).  
Rotation +/-90°.

### Power Supply



Code

**1E3557**

EL power supply version kit composed of an aluminium watertight box (LxHxP=270x49,5x44mm) complete with power supply input cable (1 metre, type H07RN8-F, 3G1mm<sup>2</sup>) and an output cable to the fixture (1 metre, type H07RN8-F, 3G1mm<sup>2</sup>).  
For the L 312.5/344mm versions.



Code

**1E3558**

EL power supply version kit composed of an aluminium watertight box (LxHxP=486x49,5x44mm) complete with power supply input cable (1 metre, type H07RN8-F, 3G1mm<sup>2</sup>) and an output cable to the fixture (1 metre, type H07RN8-F, 3G1mm<sup>2</sup>).  
For the L 593.5/625/873.5/905/1153.5/1185mm versions.



Code

**1E3559**

DALI power supply version kit composed of an aluminium watertight box (LxHxP=486x49,5x44mm) complete with power supply input cable (1 metre, type H07RN8-F, 5G1mm<sup>2</sup>) and an output cable to the fixture (1 metre, type H07RN8-F, 3G1mm<sup>2</sup>).  
For the L 312.5/344/593.5/625mm versions.



Code

**1E3560**

DALI power supply version kit composed of an aluminium watertight box (LxHxP=486x49,5x44mm) complete with power supply input cable (1 metre, type H07RN8-F, 5G1mm<sup>2</sup>) and an output cable to the fixture (1 metre, type H07RN8-F, 3G1mm<sup>2</sup>).  
For the L 873.5/905/1153.5/1185mm versions.

## Note

The drivers selected by Targetti make the fixtures "Safe Flicker".



## Outdoor



# JEDI COMPACT


## Accessories

### Grid



L	H	P	Colour	Code
280	48	57	●	<b>1E3900</b>
560	48	57	●	<b>1E3901</b>
840	48	57	●	<b>1E3902</b>
1120	48	57	●	<b>1E3903</b>


Symmetric grid in stainless steel, powder-painted.  
External mounting respect to fixture.  
To be used with SPOT, FLOOD and GRAZING optics.



L	H	P	Colour	Code
280	48	57	●	<b>1E3904</b>
560	48	57	●	<b>1E3905</b>
840	48	57	●	<b>1E3906</b>
1120	48	57	●	<b>1E3907</b>


Asymmetric grid in stainless steel, powder-painted.  
External mounting respect to fixture.

### Ray Shade



L	H	P	Colour	Code
290	48	59	●	<b>1E3908</b>
570	48	59	●	<b>1E3909</b>
850	48	59	●	<b>1E3910</b>
1130	48	59	●	<b>1E3911</b>

Hood in stainless steel, powder-painted.  
External mounting respect to fixture.



L	H	Colour	Code
296	54	●	<b>1E3912</b>
576	54	●	<b>1E3913</b>
856	54	●	<b>1E3914</b>
1136	54	●	<b>1E3915</b>

Adjustable hood in stainless steel, powder-painted.  
External mounting respect to fixture.

### Tool



Code
<b>1E3305</b>

(Tightening) wrench for the connector kit.

### Connector



Code
<b>1E2769</b>

Linear connection box IP66/IP68.  
5 poles max. wire section 1.5mm<sup>2</sup>.  
Cable diameter range from 7 to 12mm.



Code
<b>1E2494</b>

Multiple connection box IP68.  
1IN - 3 OUT 4 poles max. wire section 2.5mm<sup>2</sup>.  
Cable diameter range from 6 to 12mm.

# JEDI COMPACT



Code
1E3184
IP68 4-way cable connector (5 pole).

## Control systems



Code
1E3048
A IP67 Module for individual control of external devices equipped with DALI drivers. The module needs to be positioned in order to receive radio signals. The distance to the lighting fixtures can reach up to 50m. Wireless control via the Casambi application. LxHxP=56.5x22.3x35.8mm.




Code
1E3049
IP67 Extender for wireless control of DALI fixtures. It generates a local DALI bus with the capacity to drive up to 64 fixtures. Can control DALI fixtures in outdoor applications via the Casambi application. LxHxP=150x40x148mm.

**Capilla Las Marias**  
Villavicencio, Colombia

**Engineering** Schallertech  
**Architectural Design**  
Monica Franco - MF Arquitectos

**Lighting Design** Luis Miguel Aristizabal -  
SchallerTech  
**Photographer** CVAUDIOVISUALES

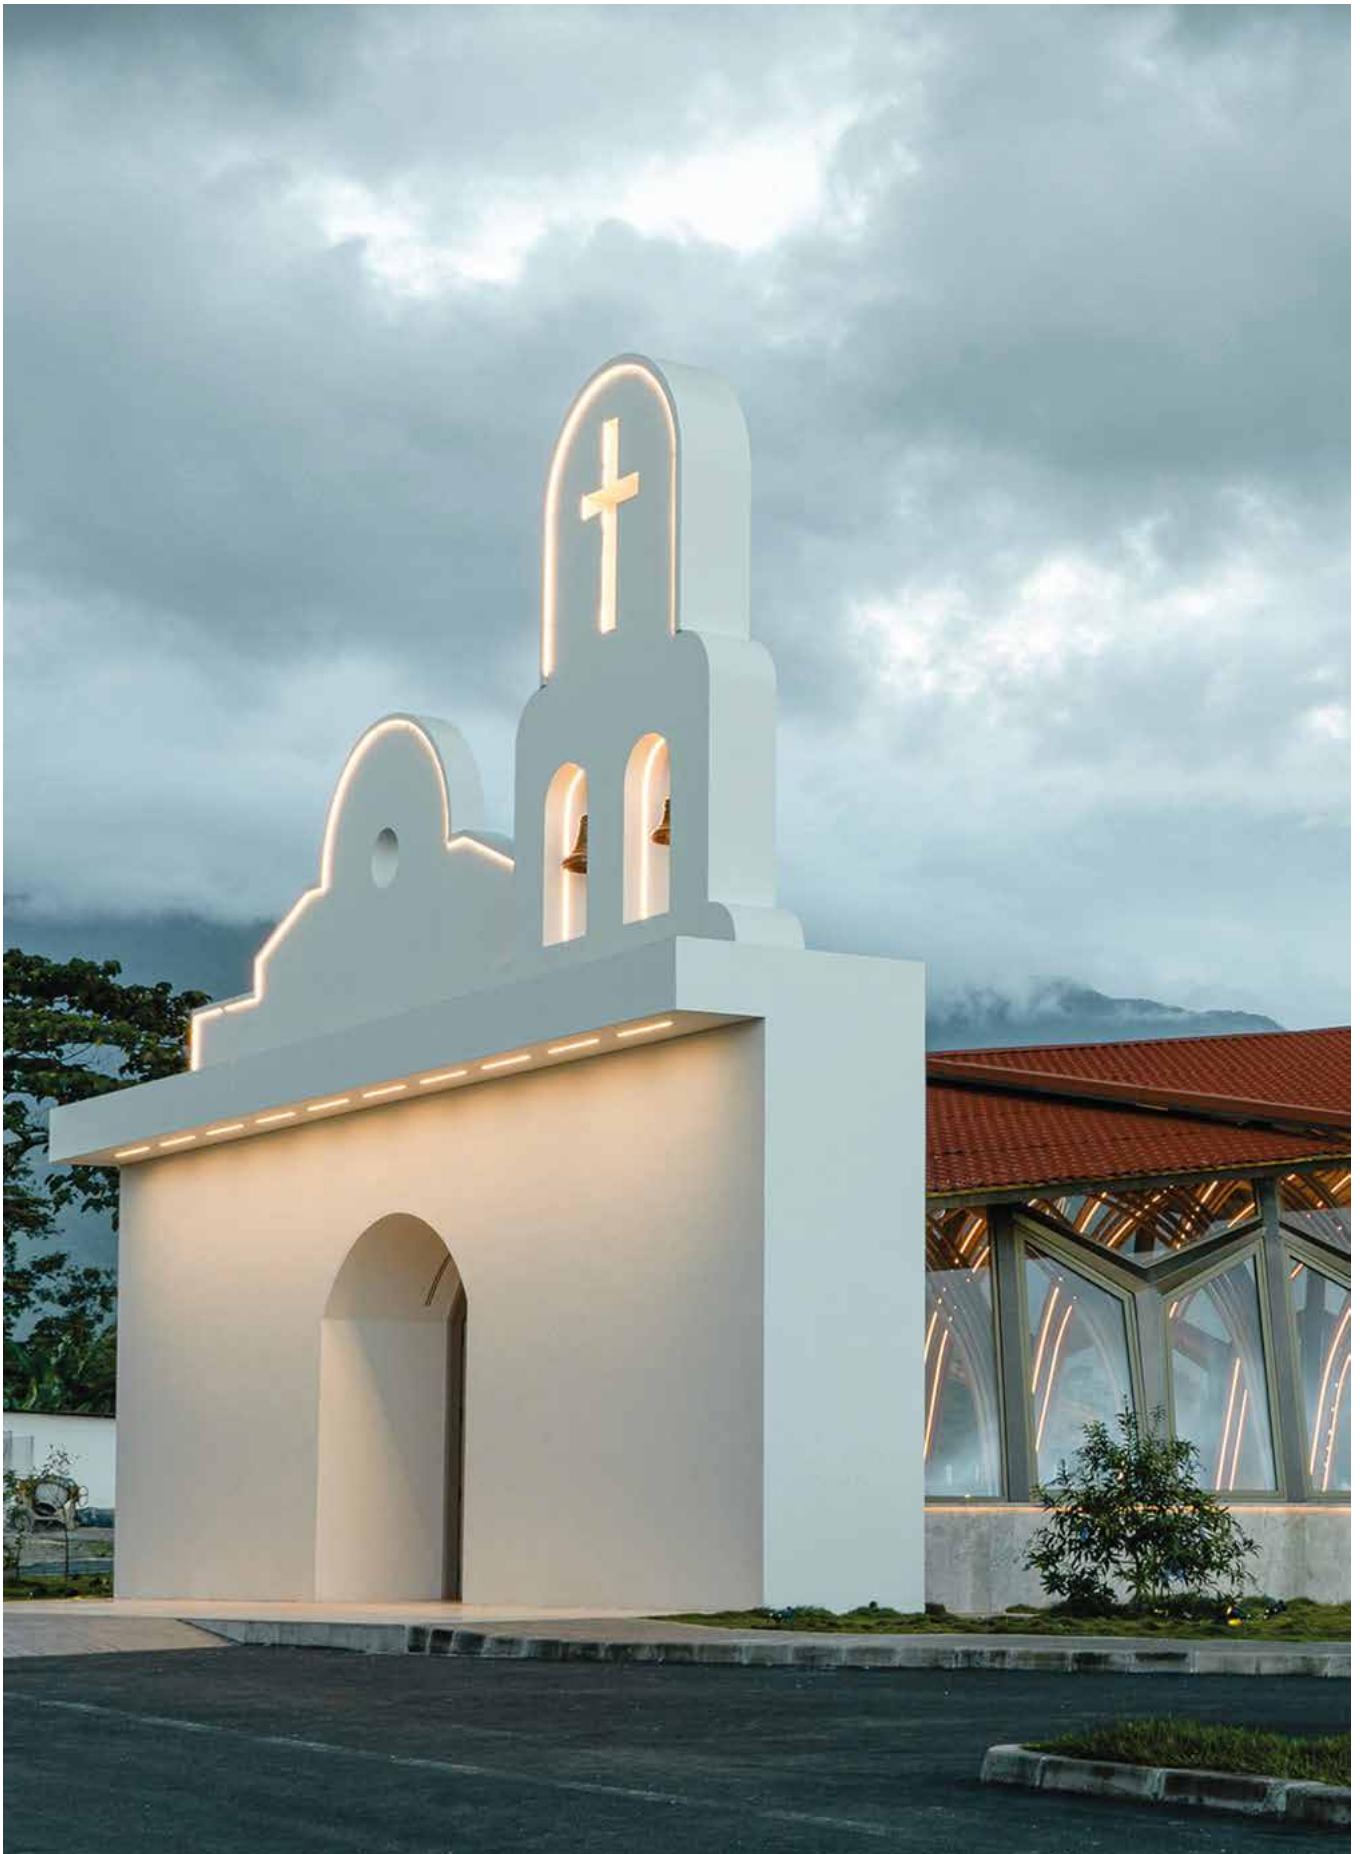

**Projectors**

## Requisites and information

All fixtures of the Targetti collection have been designed and produced to comply with European Standard EN60598-1 relative to the safety requisite of light fixtures.



All fixtures comply with the following directives:

- EMC Directive 2014/30/EU
- LV Directive 2014/35/EU
- RoHS Directive 2011/65/EU

## Unless specified otherwise

- all fixtures are supplied without lamps;
- all fixtures are sold separately;
- all measurements are expressed in millimeters;
- all fixtures at low voltage are supplied without transformer;
- For products in Class III performance is only guaranteed using the electronic power supplies and drivers indicated in the catalogue.

## Consorzio ecolight

Targetti Sankey Spa is a member of the Ecolight consortium that was set up in 2004 (D.Lgs. 49/2014) to comply with the provisions of the European Directive that was adopted in Italy as the European Directive 2012/19/EU for WEEE on managing, recovering and treating waste electrical and electronic equipment, used batteries and accumulators in compliance with all applicable legislation.

The colors of the products illustrated are reproduced as faithfully as possible compatibly with the technical limitations of the printed medium. The company reserves the right to make changes to the production without notice. Reproduction of this catalogue or any part of it is prohibited. The products illustrated in this catalogue are covered by one or more Italian or international patents. The company will take legal action against any imitators.



### TARGETTI SANKEY SpA

Certificated ISO 9001 n° 9130. TAR1  
Certificated ISO 14001 n° IT319206

The Enec mark, ISO9001 and ISO14001 certifications and the CE marking all guarantee that the activities carried out internally in the company are governed and controlled by procedures which assure constant level of quality.

Accredited laboratory in accordance with ISO 17025.

## Light beam apertures

from	to	beam	
5°	10°	Narrow Spot	<b>NSP</b>
11°	25°	Spot	<b>SP</b>
26°	40°	Flood	<b>FL</b>
41°	50°	Medium Wide Flood	<b>MWFL</b>
51°	70°	Wide Flood	<b>WFL</b>
71°	120°	Very Wide Flood	<b>VWFL</b>
		Wall Washer	<b>WW</b>
		Narrow Asymmetric	<b>N. ASYM</b>
		Asymmetric	<b>ASYM</b>

## Icons legend

	Class I luminaire in which the protection against electrical shock is guaranteed by the connections of the conductive elements accessible to a protective conductor (earth connection).
	Luminaire in which the connection to a protective conductor (earth connection) guarantees the immunity to radio noises.
	Class II luminaire (double insulation), protected against the accidental contact with parts under tension from the user.
	Class III luminaire, suitable for connection to very low voltage circuits.
	Solid particle and liquid ingress protection degree.
	Protection degree - Recessed part . Protection degree - Exposed part.
	Impact protection degree.
	ENEC European Norms Electrical Certification.

## Particular symbols

	Weight of the single fixture.
	Cable length.
	Walk-over.
	Driver-over safe.
	Fixtures that have parameters below the minimum visibility threshold $PstLM \leq 1$ and $SVM \leq 0.4$ (IEC TR 61547-1 and IEC TR 63158).
DBS	Dynamic Beam Shaper optical technology with remote management of the beam opening.
	LED with $Ra_{\text{---}}$ where not present in the catalogue, available on request.
	Different colour temperatures available on request.
	Custom finish of your choice from the Targetti Colours range and RAL indicated in the colour chart can be downloaded on line from the download section.
	Treatment carried out on request.
	Supplied on request with an integrated or remote 110-277Vac power supply as indicated for the standard model.
	LED version with a different "Tunable White" tone available on request.

### Note

- ➔ Please contact us for on demand treatments and versions.
- ➔ The performances reported on the products refer to the use of the recommended drivers.
- ➔ The drivers selected by Targetti make the fixtures "Safe Flicker".

