


Ceiling, Suspensions and Wall

OZ





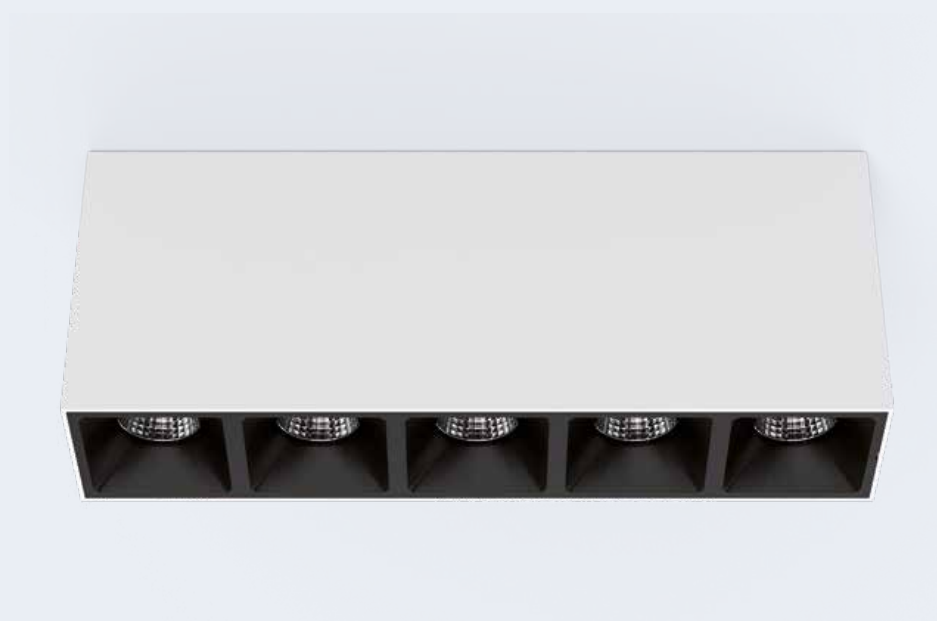














TARGETTI


OZ STAND ALONE CEILING-MOUNTED



The OZ stand alone ceiling-mounted version provides downlight solutions inspired by the 48V system version. Available only in the Large size the OZ Stand Alone ceiling mounted range includes 3x and 5x multiple solutions in black and white finishes equipped with different optical systems. Also available in a recessed version.



							
Ceiling-mounted	Accent	Soft controlled	Elliptical	2700K	3000K	3500K	4000K
INSTALLATION		LIGHT		COLOUR TEMPERATURE			
							
On-Off	Dali	Casambi	220-240V	900mA	White	Black	Easy Custom Colours
CONTROL		POWER SUPPLY		FINISH			
							
Emergency lighting							
ACCESSORY							



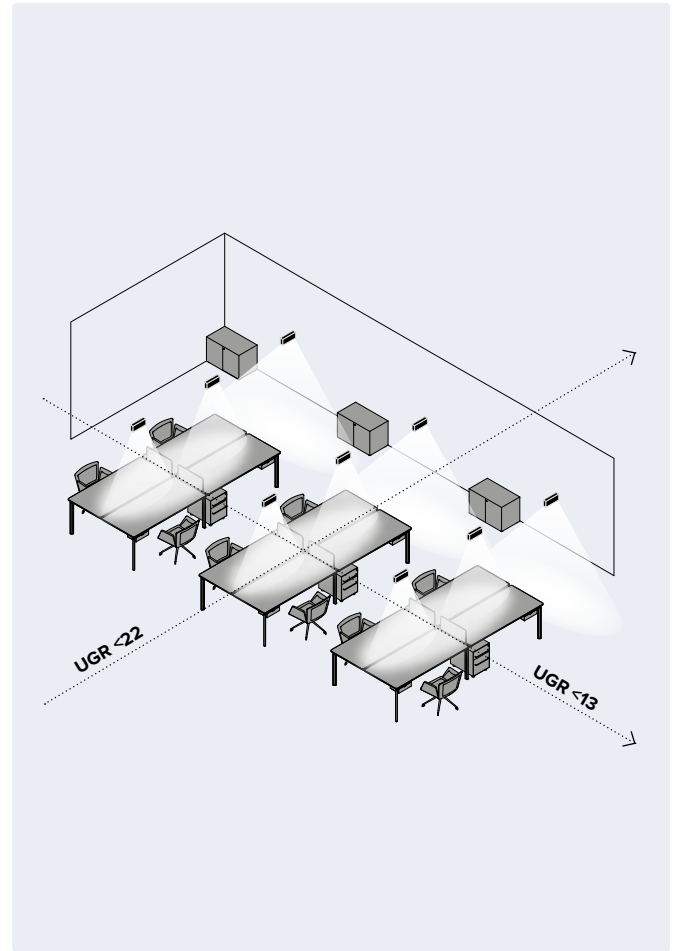


Elliptical optical systems to enhance particular spaces
 The OZ elliptical optical systems are suitable for lighting long, narrow spaces such as corridors, hallways and passageways, as well as specific work areas, even in the office environment (EN12464-1).[1]
 They are available in two different versions:

- Longitudinal elliptical optical system
- Transversal elliptical optical system





ELLIPTICAL OPTICAL SYSTEMS	UGR	
	UGR<13	UGR<22
ELL longitudinal		
ELT transversal		

The optical systems in the OZ Stand Alone range are designed to provide precise solutions for every space. They have different effects for lighting spaces with different shapes and needs.

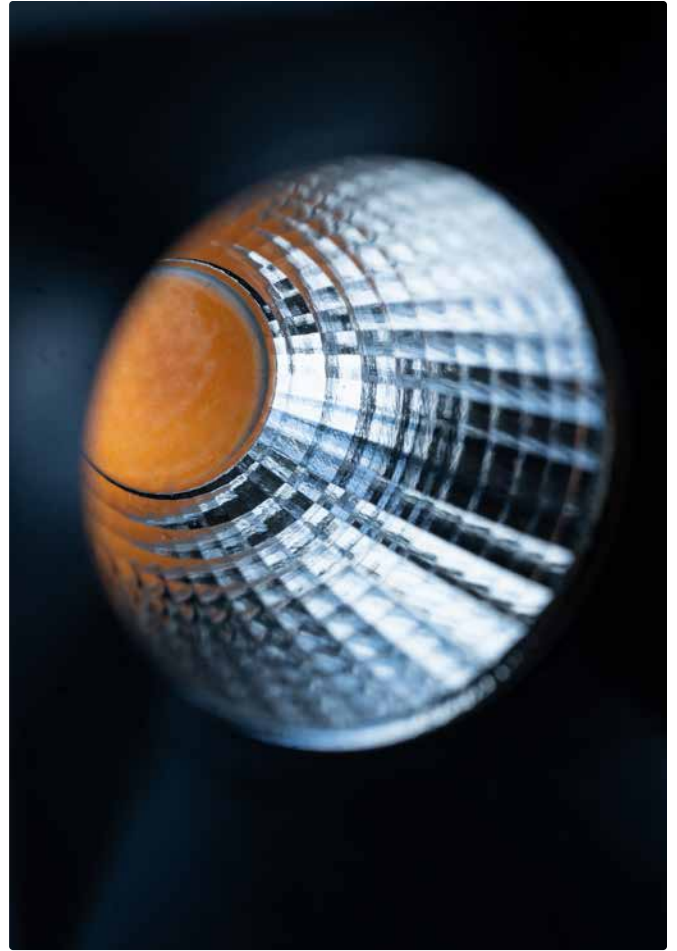

Ambient and controlled light roto-symmetrical optical systems SP – FL – WFL
The OZ roto-symmetrical optical systems are suitable for lighting lounge areas, relaxation areas and all those environments where scenographic but highly controlled light is needed.



The Ambient versions are equipped with holographic filters that diffuse and soften the light.



ROTO-SYMMETRICAL OPTICAL SYSTEMS	SMALL	LARGE
AM - Ambient	UGR<14,5	UGR<14,5
SP - Spot	UGR<13	UGR<17
FL - Flood	UGR<13	UGR<17
WFL - Wide Flood	UGR<13	UGR<17



OZ STAND ALONE CEILING-MOUNTED
Up to 113lm/W
From 1004lm to 3372lm
2700K - 3000K - 3500K - 4000K
Ra90

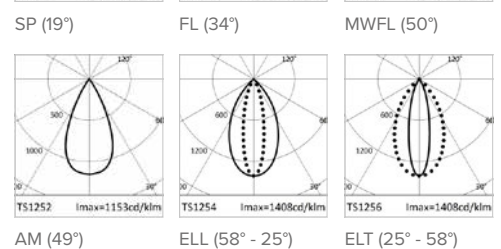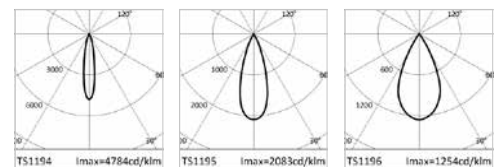

* The luminous flux and efficiency (fixture) figures on this page refer to the 3000K LED.

OZ Stand Alone | Ceiling Luminaire | Large 3x | 153x53mm
220-240Vac | Ra90 | Fixture flux 3000K from 1004lm to 2023lm

		Optic	Driver	Colour	2700K	3000K	3500K	4000K
SP 19° 20W		ON-OFF			1T7890EL	1T7891EL	1T7892EL	1T7893EL
		DALI			1T7902EL	1T7903EL	1T7904EL	1T7905EL
FL 34° 19W		ON-OFF			1T7894EL	1T7895EL	1T7896EL	1T7897EL
		DALI			1T7894DA	1T7895DA	1T7896DA	1T7897DA
MWFL 50° 19W		ON-OFF			1T7898EL	1T7899EL	1T7900EL	1T7901EL
		DALI			1T7898DA	1T7899DA	1T7900DA	1T7901DA
AM 49° 19W		ON-OFF			1T8898EL	1T8899EL	1T8900EL	1T8901EL
		DALI			1T8898DA	1T8899DA	1T8900DA	1T8901DA
ELL 11W		ON-OFF			1T8902EL	1T8903EL	1T8904EL	1T8905EL
		DALI			1T8902DA	1T8903DA	1T8904DA	1T8905DA
ELT 11W		ON-OFF			1T8906EL	1T8907EL	1T8908EL	1T8909EL
		DALI			1T8906DA	1T8907DA	1T8908DA	1T8909DA

OZ Stand Alone | Ceiling Luminaire | Large 5x | 253x53mm
220-240Vac | Ra90 | Fixture flux 3000K from 1835lm to 3372lm

		Optic	Driver	Colour	2700K	3000K	3500K	4000K
SP 19° 35W		ON-OFF			1T7914EL	1T7915EL	1T7916EL	1T7917EL
		DALI			1T7926EL	1T7927EL	1T7928EL	1T7929EL
FL 34° 33W		ON-OFF			1T7914DA	1T7915DA	1T7916DA	1T7917DA
		DALI			1T7926DA	1T7927DA	1T7928DA	1T7929DA
MWFL 50° 33W		ON-OFF			1T7918EL	1T7919EL	1T7920EL	1T7921EL
		DALI			1T7930EL	1T7931EL	1T7932EL	1T7933EL
AM 49° 33W		ON-OFF			1T7930DA	1T7931DA	1T7932DA	1T7933DA
		DALI			1T7922EL	1T7923EL	1T7924EL	1T7925EL
ELL 21W		ON-OFF			1T7934EL	1T7935EL	1T7936EL	1T7937EL
		DALI			1T7922DA	1T7923DA	1T7924DA	1T7925DA
ELT 21W		ON-OFF			1T7934DA	1T7935DA	1T7936DA	1T7937DA
		DALI			1T8938EL	1T8939EL	1T8940EL	1T8941EL
		ON-OFF			1T8950EL	1T8951EL	1T8952EL	1T8953EL
		DALI			1T8938DA	1T8939DA	1T8940DA	1T8941DA
		ON-OFF			1T8950DA	1T8951DA	1T8952DA	1T8953DA
		DALI			1T8942EL	1T8943EL	1T8944EL	1T8945EL
		ON-OFF			1T8954EL	1T8955EL	1T8956EL	1T8957EL
		DALI			1T8942DA	1T8943DA	1T8944DA	1T8945DA
		ON-OFF			1T8954DA	1T8955DA	1T8956DA	1T8957DA
		DALI			1T8946EL	1T8947EL	1T8948EL	1T8949EL
		ON-OFF			1T8958EL	1T8959EL	1T8960EL	1T8961EL
		DALI			1T8946DA	1T8947DA	1T8948DA	1T8949DA
		ON-OFF			1T8958DA	1T8959DA	1T8960DA	1T8961DA
		DALI						



TARGETTI SANKEY Srl
Certificated ISO 9001 n° 9130. TAR1
Certificated ISO 14001 n° IT319206

The Enec mark, ISO9001 and ISO14001 certifications and the CE marking all guarantee that the activities carried out internally in the company are governed and controlled by procedures which assure constant level of quality.

Accredited laboratory in accordance with ISO 17025.

Requisites and information

All fixtures of the Targetti collection have been designed and produced to comply with European Standard EN60598-1 relative to the safety requisite of light fixtures.



DIRECTIVES EUROPEAN COUNCIL

All fixtures comply with the following directives:

- EMC Directive 2014/30/EU
- LV Directive 2014/35/EU
- RoHS Directive 2011/65/EU

Unless specified otherwise

- all fixtures are supplied without lamps;
- all fixtures are sold separately;
- all measurements are expressed in millimeters;
- all fixtures at low voltage are supplied without transformer;
- For products in Class III performance is only guaranteed using the electronic power supplies and drivers indicated in the catalogue.



Targetti offers a five years warranty on the products that use LED light sources included in the Catalogues (unless otherwise specified).

The extension of guarantee does not apply to products with traditional light bulbs, to all the products for light management and control systems, both by Targetti and those by third parties, or to Targetti products fitted with 230V LED modules. For products fitted with traditional bulbs / LED bulbs, the warranty extension is valid only for the lighting product. The five years warranty is valid from the invoice date and covers any manufacturing and/or material defect found in products, if they are used in accordance with their intended use. The warranty terms are available on the Extension of guarantee.









Consorzio ecolight

Targetti Sankey Srl is a member of the Ecolight consortium that was set up in 2004 (D.Lgs. 49/2014) to comply with the provisions of the European Directive that was adopted in Italy as the European Directive 2012/19/EU for WEEE on managing, recovering and treating waste electrical and electronic equipment, used batteries and accumulators in compliance with all applicable legislation.










The colors of the products illustrated are reproduced as faithfully as possible compatibly with the technical limitations of the printed medium.

The company reserves the right to make changes to the production without notice. Reproduction of this catalogue or any part of it is prohibited. The products illustrated in this catalogue are covered by one or more Italian or international patents. The company will take legal action against any imitators.

Icons legend

	Class I luminaire in which the protection against electrical shock is guaranteed by the connections of the conductive elements accessible to a protective conductor (earth connection).
	Luminaire in which the connection to a protective conductor (earth connection) guarantees the immunity to radio noises.
	Class II luminaire (double insulation), protected against the accidental contact with parts under tension from the user.
	Class III luminaire, suitable for connection to very low voltage circuits.
	Solid particle and liquid ingress protection degree.
	Protection degree - Recessed part . Protection degree - Exposed part.
	Impact protection degree.
	ENEC European Norms Electrical Certification.

Particular symbols

	Weight of the single fixture
	Cable length
	Walk-over
	Driver-over safe
	Fixtures that have parameters below the minimum visibility threshold $PstLM \leq 1$ and $SVM \leq 0.4$ (IEC TR 61547-1 and IEC TR 63158).
	Casambi with accessories
	Casambi ready
	DMX on board
	DBS (Dynamic Beam Shaping) optic system

Light beam apertures

Optics	Optic description	from	to
NSP	Narrow Spot	5°	10°
SP	Spot	11°	21°
FL	Flood	22°	40°
MWFL	Medium Wide Flood	41°	50°
WFL	Wide Flood	51°	70°
VWFL	Very Wide Flood	71°	120°
WW	Wall Washer		
ASY	Asymmetric		
FW	Floor Washer		
ELL	Elliptical		
ELT	Elliptical Transversal		
AMB	Ambient		
OPL	Opal		
GRZ	Grazing		
UGR	UGR		
ZOOM	Zoom		
DBS	Dynamic Beam Shaping		

Note

- Please contact us for on demand treatments and versions.
- The performances reported on the products refer to the use of the recommended drivers.
- The drivers selected by Targetti make the fixtures "Safe Flicker".

