

Projectors

PYROS














TARGETTI

PYROS

Outdoor



Nano Pyros and Pico Pyros are professional tools to light architecture and landscape. They are particularly suitable for lighting facades, porticos, trees and borders and for all those design contexts in which the precision of the effect must be combined with the excellence of the performance. Both Nano Pyros and Pico Pyros are adjustable on the two axes with aiming lock. Nano Pyros allows for rotation of 135° on the vertical plane and +/-110° on the horizontal plane. Pico Pyros is adjustable by 180° on the vertical plane and +/-45° on the horizontal plane.

							
Surface	Ground	Accent	Soft controlled	3000K	4000K		
INSTALLATION		LIGHT		COLOUR TEMPERATURE			
							
On-Off	220-240V	IP66 IP67	IK10				
CONTROL		POWER SUPPLY		PROTECTION RATING		RESISTANCE	
	110-277V Power Supply (Nano Pyros) Cataphoresis treatment						
FINISH		ON REQUEST					




NANO PYROS
220-240Vac | Ra80 | Fixture flux 3000K from 1729lm to 2663lm



Optic	Driver	Colour	3000K	4000K
SP 13° 25W	ON-OFF	●	1E2827	1E2828
FL 32° 25W	ON-OFF	●	1E2829	1E2830
MWFL 45° 24W	ON-OFF	●	1E2831	1E2832

Note Accessory codes on page 4.

PICO PYROS
220-240Vac | Ra80 | Fixture flux 3000K from 361lm to 408lm

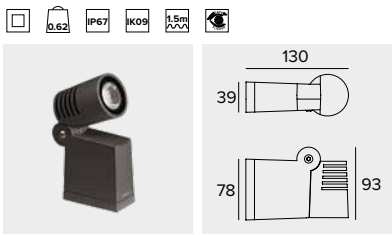

Optic	Driver	Colour	3000K	4000K
SP 18° 11W	ON-OFF	●	1E2857	1E2859
FL 36° 11W	ON-OFF	●	1E2858	1E2860

Note Accessory codes on page 5.

Accessory codes
NANO PYROS

Filter

	Kg	Ø mm	Code		Kg	Ø mm	Code
	0.25	107	1E2853		0.25	107	1E2854
<p>"Blade of light" effect refractive filter. The special linear incisions modify the light beam, enlarging it in a perpendicular direction to the incisions. With very narrow beams it is possible to obtain precise "blades" of light. Complete with ring.</p>				<p>"Soft beam" effect refractive filter. The special linear incisions reduce the variance between the primary and secondary light beam, making it more uniform. Complete with ring.</p>			

Grid

	Code
	1E2766
<p>Anti-glare louver. Black painted metal honeycomb structure. Designed to be housed inside the fixture.</p>	



Screen

	Code
	1E2855
<p>Adjustable stainless steel asymmetric screen with 8 positions and 2 mounting screws. Permits the shielding of the light beam with wide beam optics. 0.7Kg.</p>	

Ray Shade

	Code
	1E2856
<p>Stainless steel barn door with fixed flaps, adjustable to 4 positions with 2 mounting screws. 0.26Kg.</p>	

Mounting System


	Kg	L mm	Code		Kg	L mm	Code
	0.5	200	1E2845		0.5	232	1E2847
	1.3	800	1E2846		6.5	832	1E2848
	Earthspike.				<p>Spike with base for surface installation.</p> <p>1E2847 - Short peg with base for surface mounting.</p> <p>1E2848 - Long peg with base for surface mounting.</p>		

Accessory codes
PYROS | Codes compatible with the whole range

Connector

	Code		Code
	1E2769		1E2494
Linear connection box IP66/IP68. 5 poles max. wire section 1.5mm ² . Cable diameter range from 7 to 12mm.		Multiple connection box IP68. 1 IN - 3 OUT 4 poles max. wire section 2.5mm ² . Cable diameter range from 6 to 12mm.	

Surge protector

	Code
	A013B
Surge protector compatible with CLASS II lighting fixtures and electronic drivers. Operating voltage 220-240Vac. SPD type 2+3. Max surge protection 10kV. CLASS II IP67	



TARGETTI SANKEY Srl
Certificated ISO 9001 n° 9130. TAR1
Certificated ISO 14001 n° IT319206

The Enec mark, ISO9001 and ISO14001 certifications and the CE marking all guarantee that the activities carried out internally in the company are governed and controlled by procedures which assure constant level of quality.

Accredited laboratory in accordance with ISO 17025.

Requisites and information

All fixtures of the Targetti collection have been designed and produced to comply with European Standard EN60598-1 relative to the safety requisite of light fixtures.



All fixtures comply with the following directives:

- EMC Directive 2014/30/EU
- LV Directive 2014/35/EU
- RoHS Directive 2011/65/EU

Unless specified otherwise

- all fixtures are supplied without lamps;
- all fixtures are sold separately;
- all measurements are expressed in millimeters;
- all fixtures at low voltage are supplied without transformer;
- For products in Class III performance is only guaranteed using the electronic power supplies and drivers indicated in the catalogue.



Targetti offers a five years warranty on the products that use LED light sources included in the Catalogues (unless otherwise specified).

The extension of guarantee does not apply to products with traditional light bulbs, to all the products for light management and control systems, both by Targetti and those by third parties, or to Targetti products fitted with 230V LED modules. For products fitted with traditional bulbs / LED bulbs, the warranty extension is valid only for the lighting product. The five years warranty is valid from the invoice date and covers any manufacturing and/or material defect found in products, if they are used in accordance with their intended use. The warranty terms are available on the Extension of guarantee.









Consorzio ecolight

Targetti Sankey Srl is a member of the Ecolight consortium that was set up in 2004 (D.Lgs. 49/2014) to comply with the provisions of the European Directive that was adopted in Italy as the European Directive 2012/19/EU for WEEE on managing, recovering and treating waste electrical and electronic equipment, used batteries and accumulators in compliance with all applicable legislation.










The colors of the products illustrated are reproduced as faithfully as possible compatibly with the technical limitations of the printed medium.

The company reserves the right to make changes to the production without notice. Reproduction of this catalogue or any part of it is prohibited. The products illustrated in this catalogue are covered by one or more Italian or international patents. The company will take legal action against any imitators.

Icons legend

	Class I luminaire in which the protection against electrical shock is guaranteed by the connections of the conductive elements accessible to a protective conductor (earth connection).
	Luminaire in which the connection to a protective conductor (earth connection) guarantees the immunity to radio noises.
	Class II luminaire (double insulation), protected against the accidental contact with parts under tension from the user.
	Class III luminaire, suitable for connection to very low voltage circuits.
	Solid particle and liquid ingress protection degree.
	Protection degree - Recessed part . Protection degree - Exposed part.
	Impact protection degree.
	ENEC European Norms Electrical Certification.

Particular symbols

	Weight of the single fixture
	Cable length
	Walk-over
	Driver-over safe
	Fixtures that have parameters below the minimum visibility threshold $PstLM \leq 1$ and $SVM \leq 0.4$ (IEC TR 61547-1 and IEC TR 63158).
	Casambi with accessories
	Casambi ready
	DMX on board
	DBS (Dynamic Beam Shaping) optic system

Light beam apertures

Optics	Optic description	from	to
NSP	Narrow Spot	5°	10°
SP	Spot	11°	21°
FL	Flood	22°	40°
MWFL	Medium Wide Flood	41°	50°
WFL	Wide Flood	51°	70°
VWFL	Very Wide Flood	71°	120°
WW	Wall Washer		
ASY	Asymmetric		
FW	Floor Washer		
ELL	Elliptical		
ELT	Elliptical Transversal		
AMB	Ambient		
OPL	Opal		
GRZ	Grazing		
UGR	UGR		
ZOOM	Zoom		
DBS	Dynamic Beam Shaping		

Note

- Please contact us for on demand treatments and versions.
- The performances reported on the products refer to the use of the recommended drivers.
- The drivers selected by Targetti make the fixtures "Safe Flicker".

