

# Ceiling, Suspensions and Wall

# **LABEL**


















**TARGETTI**

# LABEL CEILING | SUSPENSION | WALL



The ceiling-mounted, suspension and wall-mounted LABEL solutions are designed to provide professional lighting with a simple design yet with careful attention to detail. The technology, optical systems and design are the same as the track version, to meet different application needs with a coordinated range.

						
Ceiling-mounted	Suspension	Wall-mounted	Accent	Soft controlled	3000K	4000K
INSTALLATION			LIGHT		COLOUR TEMPERATURE	
						
On-Off	Dali	Casambi	220-240V	White	Black	Easy Custom Colours
CONTROL			POWER SUPPLY	FINISH		

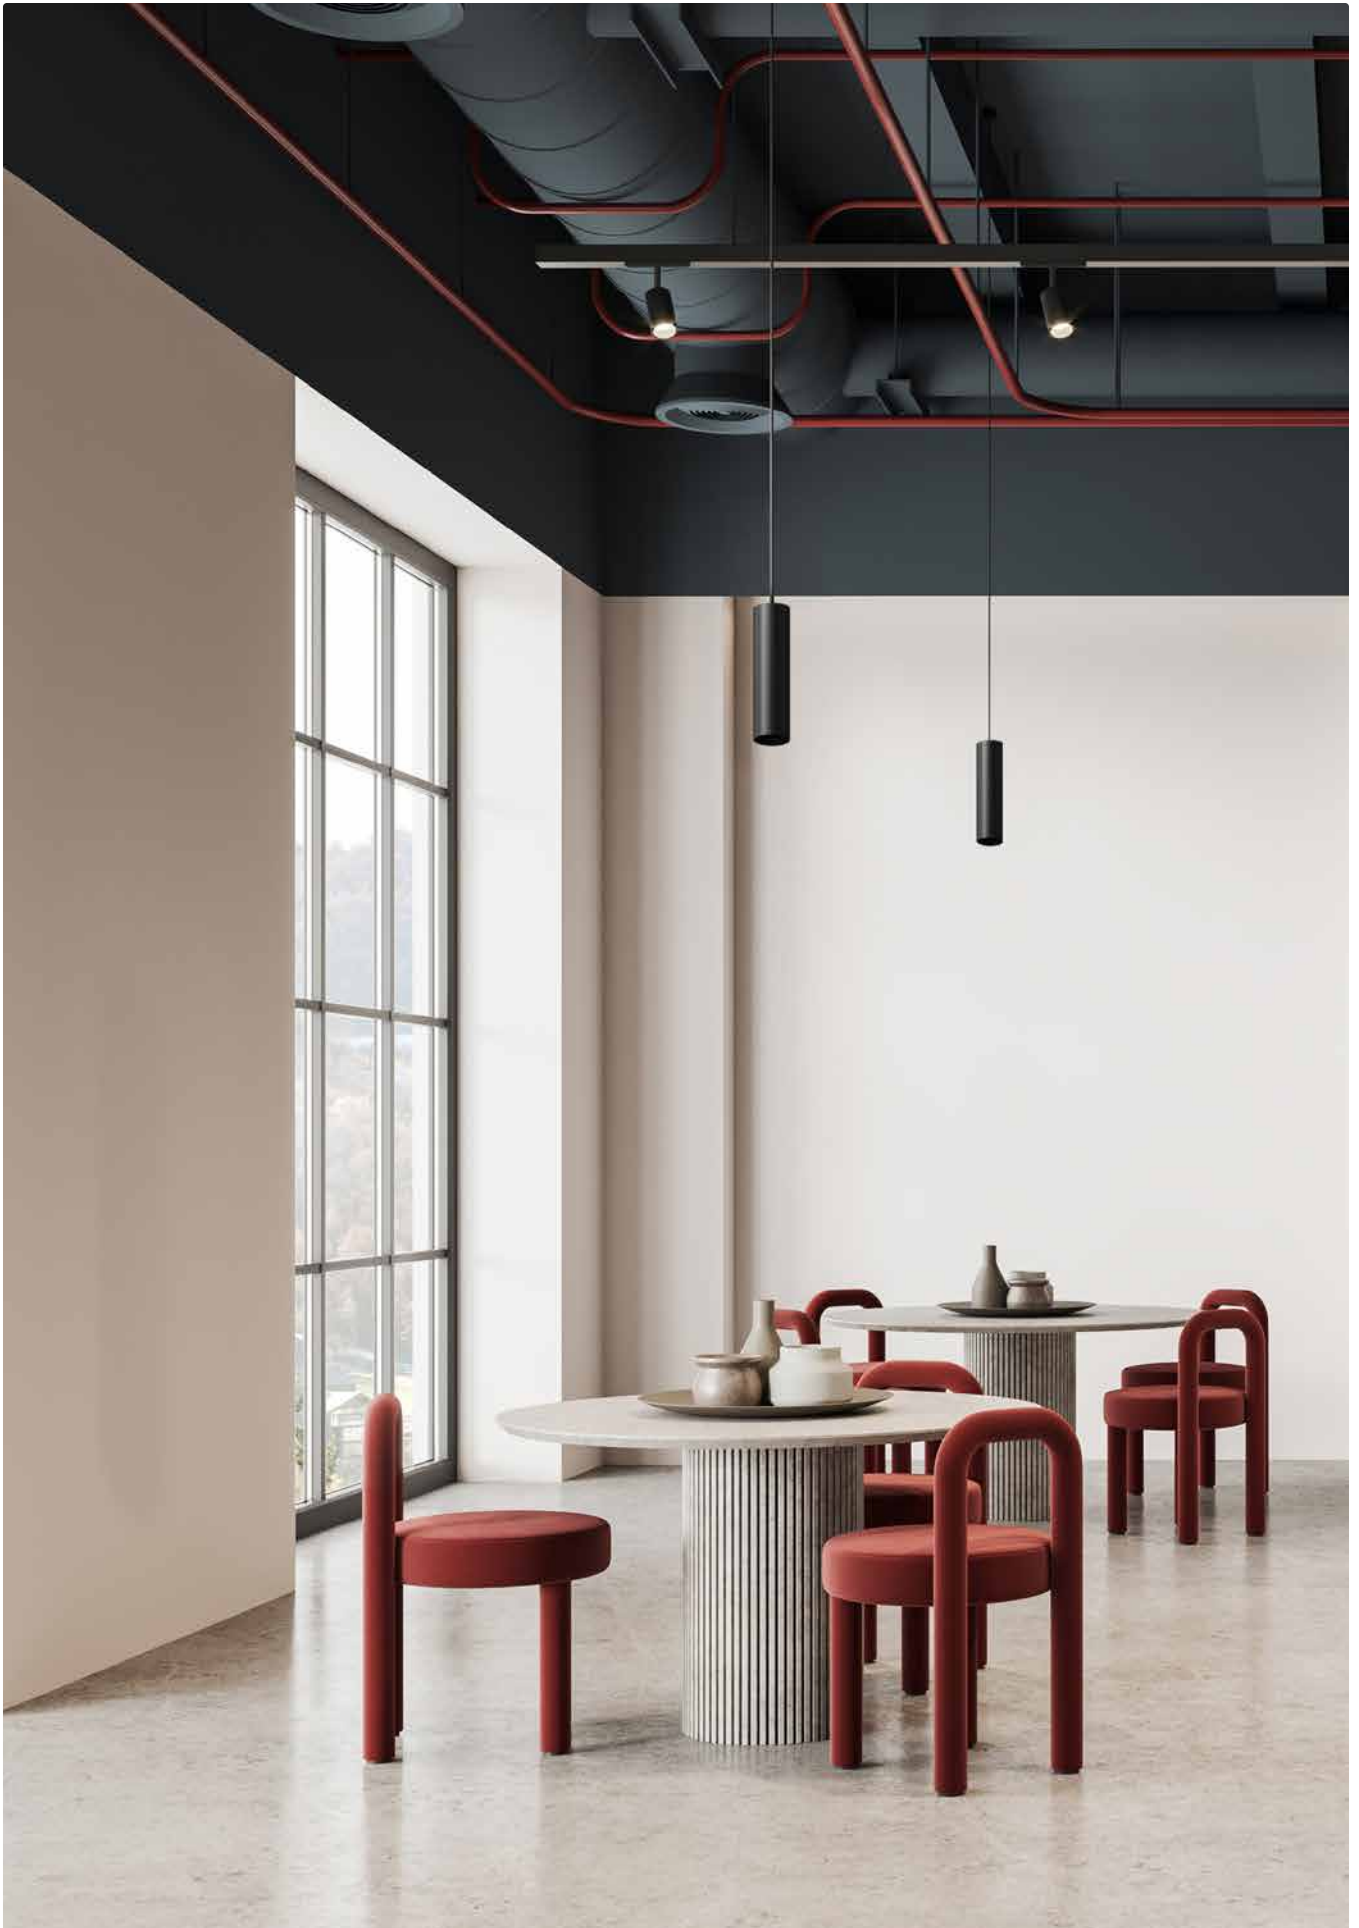



#### **Suspension**


The suspension versions have a power/suspension cable in the same colour as the body which can be easily cut to size. On the ceiling there is a small canopy where the wiring can be fitted easily.




#### **Ceiling-mounted**

The ceiling-mounted versions are easy to install. The fixing bracket is fixed to the ceiling where the wiring can be fitted easily and then the fixture is attached to it with two very small screws in the same colour. Everything is neat and tidy.

The ceiling-mounted, suspension and wall-mounted Label range is ideal for lighting stairwells, corridors, lounge areas, hotel rooms and anywhere the combination of aesthetic quality and lighting effect quality are needed.

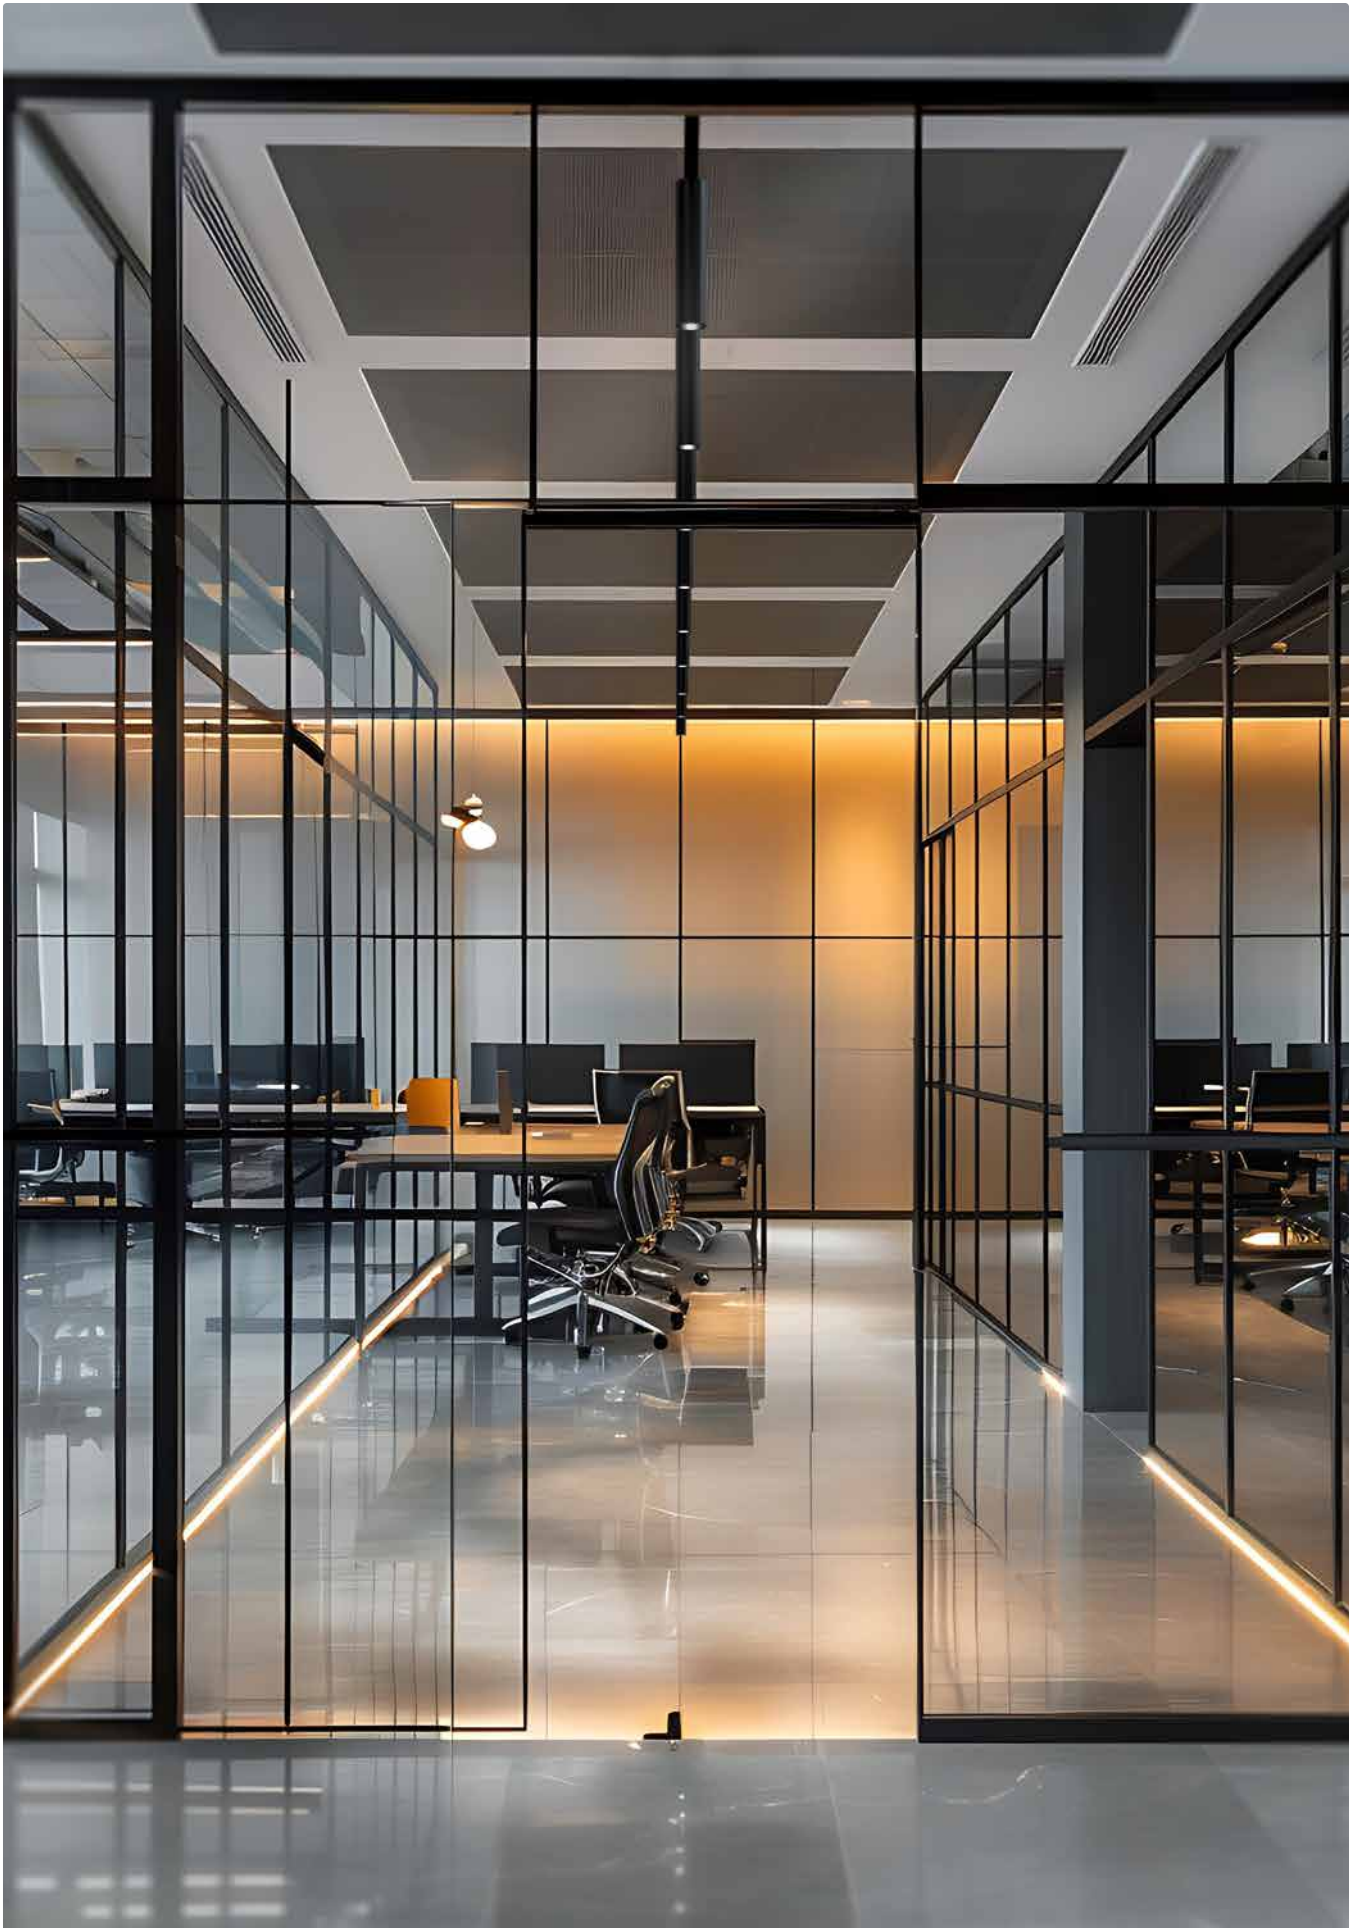

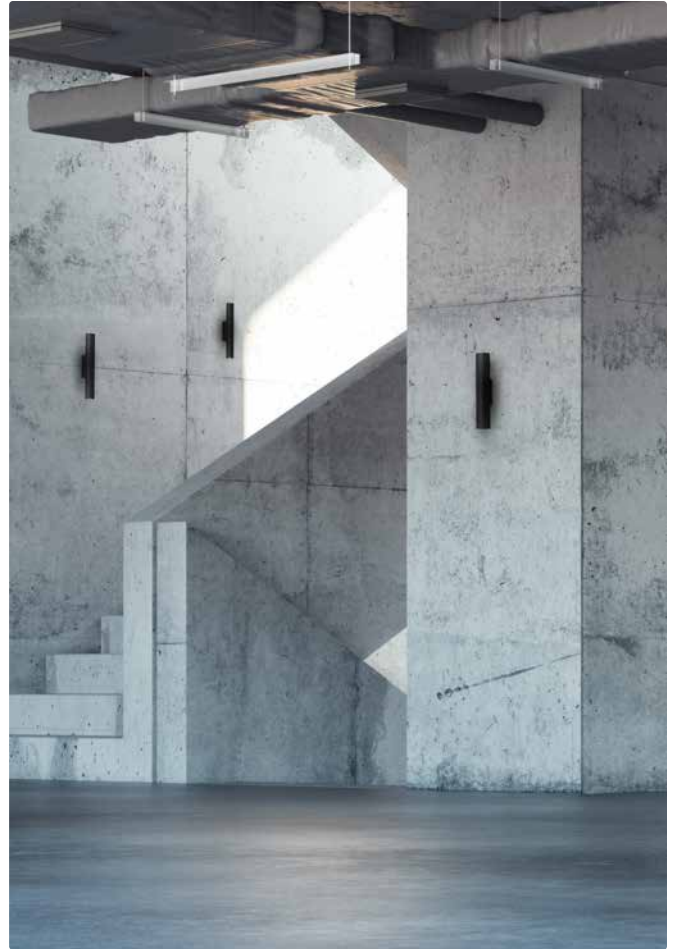


#### **Wall-mounted**

Wall-mounted Label fixtures create scenographic grazing lighting effects that are functional at the same time. They can be mono-emission that can be installed both upwards and downwards, or bi-emission for environments where it is important to tone down the shadows on the visual task by also lightening the ceiling.

The entire Label range is equipped with reflector optical systems, available with different beam openings to have a wide range of choices based on the desired atmosphere and the installation height.




**LABEL 7**  
Up to 107lm/W  
From 965lm to 2311lm  
3000K - 4000K  
Ra90

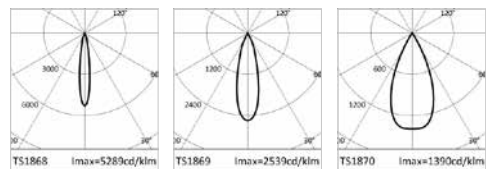

SP 16°

FL 27°

MWFL 46°

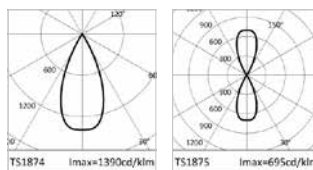


Direct  
MWFL 46°

Direct/Indirect  
MWFL 46°




**LABEL 6**  
Up to 103lm/W  
From 865lm to 1757lm  
3000K - 4000K  
Ra90

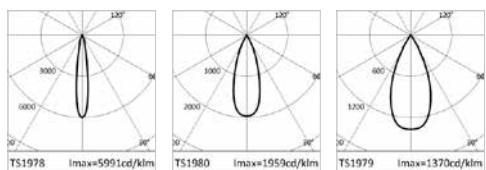

SP 16°

FL 35°

MWFL 45°

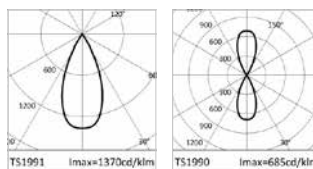


Direct  
MWFL 45°

Direct/Indirect  
MWFL 45°




**LABEL 4**  
Up to 105lm/W  
From 563lm to 1450lm  
3000K - 4000K  
Ra90

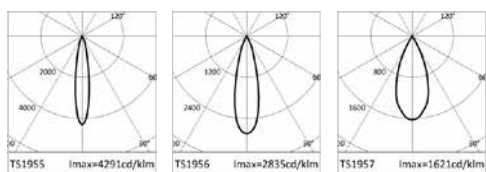

SP 18°

FL 27°

MWFL 42°

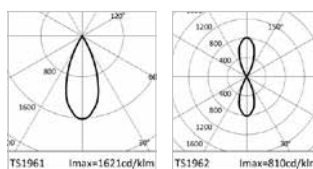

Direct  
MWFL 42°

Direct/Indirect  
MWFL 42°



## LABEL 7 | Ceiling

220-240Vac | Ra90 | Fixture flux 3000K from 965lm to 1156lm




Optic	Driver	Colour	3000K	4000K
SP 16° 12W	ON-OFF	○	1T9756EL	1T9757EL
		●	1T9762EL	1T9763EL
	DALI	○	1T9756DA	1T9757DA
		●	1T9762DA	1T9763DA
FL 27° 12W	ON-OFF	○	1T9758EL	1T9759EL
		●	1T9764EL	1T9765EL
	DALI	○	1T9758DA	1T9759DA
		●	1T9764DA	1T9765DA
MWFL 46° 12W	ON-OFF	○	1T9760EL	1T9761EL
		●	1T9766EL	1T9767EL
	DALI	○	1T9760DA	1T9761DA
		●	1T9766DA	1T9767DA

**Note** Accessory codes on page 9.

## LABEL 6 | Ceiling

220-240Vac | Ra90 | Fixture flux 3000K from 865lm to 879lm

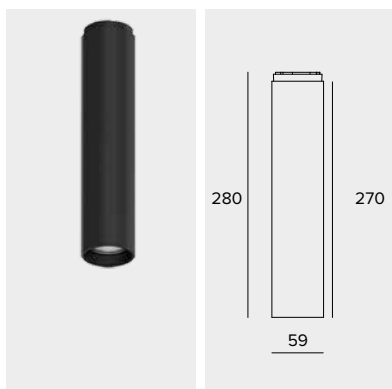


Optic	Driver	Colour	3000K	4000K
SP 16° 10W	ON-OFF	○	1T9768EL	1T9769EL
		●	1T9774EL	1T9775EL
	DALI	○	1T9768DA	1T9769DA
		●	1T9774DA	1T9775DA
FL 35° 10W	ON-OFF	○	1T9770EL	1T9771EL
		●	1T9776EL	1T9777EL
	DALI	○	1T9770DA	1T9771DA
		●	1T9776DA	1T9777DA
MWFL 45° 10W	ON-OFF	○	1T9772EL	1T9773EL
		●	1T9778EL	1T9779EL
	DALI	○	1T9772DA	1T9773DA
		●	1T9778DA	1T9779DA

**Note** Accessory codes on page 9.

## LABEL 4 | Ceiling

220-240Vac | Ra90 | Fixture flux 3000K from 563lm to 725lm

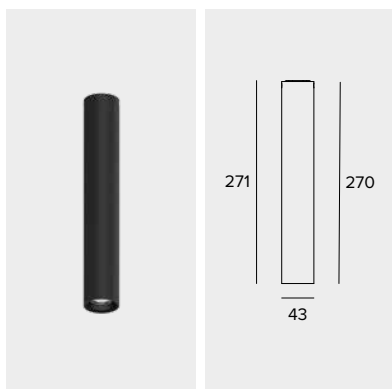

Optic	Driver	Colour	3000K	4000K
SP 18° 8W	ON-OFF	○	1T9780EL	1T9781EL
		●	1T9786EL	1T9787EL
	DALI	○	1T9780DA	1T9781DA
		●	1T9786DA	1T9787DA
FL 27° 8W	ON-OFF	○	1T9782EL	1T9783EL
		●	1T9788EL	1T9789EL
	DALI	○	1T9782DA	1T9783DA
		●	1T9788DA	1T9789DA
MWFL 42° 8W	ON-OFF	○	1T9784EL	1T9785EL
		●	1T9790EL	1T9791EL
	DALI	○	1T9784DA	1T9785DA
		●	1T9790DA	1T9791DA

**Note** Accessory codes on page 9.





Accessory codes  
LABEL | Codes compatible with the whole range

Control systems

	Code		Code
	1T5349		2T0131
IP20 wireless control unit with DALI interface. More details on page 672.		IP20 Extender for wireless control of LED driver with dimming DALI (or 1-10V) interface based on Casambi technology. More details on page 672.	

## LABEL 7 | Suspension

220-240Vac | Ra90 | Fixture flux 3000K from 965lm to 1156lm

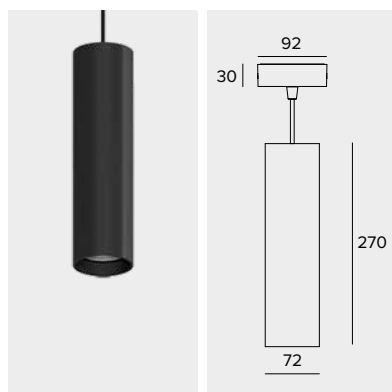



Optic	Driver	Colour	3000K	4000K
SP 16° 12W	ON-OFF	○	1T9792EL	1T9793EL
		●	1T9798EL	1T9799EL
	DALI	○	1T9792DA	1T9793DA
		●	1T9798DA	1T9799DA
FL 27° 12W	ON-OFF	○	1T9794EL	1T9795EL
		●	1T9800EL	1T9801EL
	DALI	○	1T9794DA	1T9795DA
		●	1T9800DA	1T9801DA
MWFL 46° 12W	ON-OFF	○	1T9796EL	1T9797EL
		●	1T9802EL	1T9803EL
	DALI	○	1T9796DA	1T9797DA
		●	1T9802DA	1T9803DA

**Note** Accessory codes on page 11.

## LABEL 6 | Suspension

220-240Vac | Ra90 | Fixture flux 3000K from 865lm to 879lm

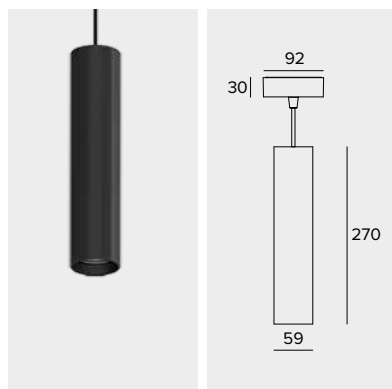



Optic	Driver	Colour	3000K	4000K
SP 16° 10W	ON-OFF	○	1T9804EL	1T9805EL
		●	1T9810EL	1T9811EL
	DALI	○	1T9804DA	1T9805DA
		●	1T9810DA	1T9811DA
FL 35° 10W	ON-OFF	○	1T9806EL	1T9807EL
		●	1T9812EL	1T9813EL
	DALI	○	1T9806DA	1T9807DA
		●	1T9812DA	1T9813DA
MWFL 45° 10W	ON-OFF	○	1T9808EL	1T9809EL
		●	1T9814EL	1T9815EL
	DALI	○	1T9808DA	1T9809DA
		●	1T9814DA	1T9815DA

**Note** Accessory codes on page 11.

## LABEL 4 | Suspension

220-240Vac | Ra90 | Fixture flux 3000K from 563lm to 725lm

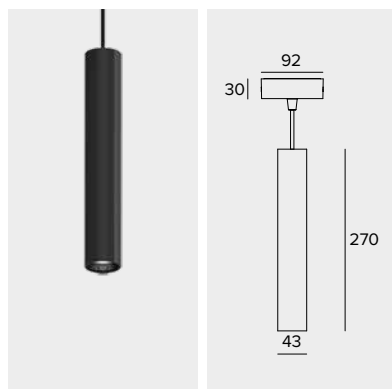

Optic	Driver	Colour	3000K	4000K
SP 18° 8W	ON-OFF	○	1T9816EL	1T9817EL
		●	1T9822EL	1T9823EL
	DALI	○	1T9816DA	1T9817DA
		●	1T9822DA	1T9823DA
FL 27° 8W	ON-OFF	○	1T9818EL	1T9819EL
		●	1T9824EL	1T9825EL
	DALI	○	1T9818DA	1T9819DA
		●	1T9824DA	1T9825DA
MWFL 42° 8W	ON-OFF	○	1T9820EL	1T9821EL
		●	1T9826EL	1T9827EL
	DALI	○	1T9820DA	1T9821DA
		●	1T9826DA	1T9827DA





**Note** Accessory codes on page 11.



Accessory codes  
LABEL | Codes compatible with the whole range









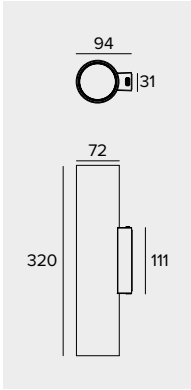Control systems

	Code		Code
	1T5349		2T0131
IP20 wireless control unit with DALI interface. More details on page 672.		IP20 Extender for wireless control of LED driver with dimming DALI (or 1-10V) interface based on Casambi technology. More details on page 672.	

**LABEL 7 | Wall**  
220-240Vac | Ra90 | Fixture flux 3000K from 1156lm to 2311lm

















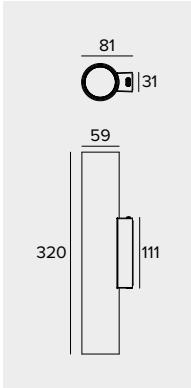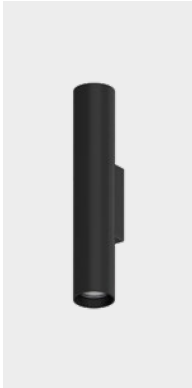

Emission	Optic	Driver	Colour	3000K	4000K
DIRECT 12W	MWFL 46°	ON-OFF		1T9936EL	1T9937EL
				1T9938EL	1T9939EL
		DALI		1T9936DA	1T9937DA
				1T9938DA	1T9939DA
DIRECT/INDIRECT 23W	MWFL 46°	ON-OFF		1T9948EL	1T9949EL
				1T9950EL	1T9951EL
		DALI		1T9948DA	1T9949DA
				1T9950DA	1T9951DA

**Note** Accessory codes on page 13.

**LABEL 6 | Wall**  
220-240Vac | Ra90 | Fixture flux 3000K from 879lm to 1757lm







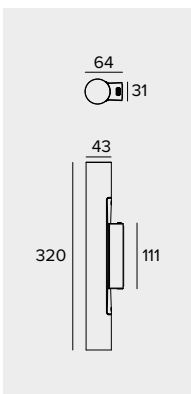











Emission	Optic	Driver	Colour	3000K	4000K
DIRECT 10W	MWFL 45°	ON-OFF		1T9940EL	1T9941EL
				1T9942EL	1T9943EL
		DALI		1T9940DA	1T9941DA
				1T9942DA	1T9943DA
DIRECT/INDIRECT 19W	MWFL 45°	ON-OFF		1T9952EL	1T9953EL
				1T9954EL	1T9955EL
		DALI		1T9952DA	1T9953DA
				1T9954DA	1T9955DA

**Note** Accessory codes on page 13.

**LABEL 4 | Wall**  
220-240Vac | Ra90 | Fixture flux 3000K from 725lm to 1450lm





Emission	Optic	Driver	Colour	3000K	4000K
DIRECT 8W	MWFL 42°	ON-OFF		1T9944EL	1T9945EL
				1T9946EL	1T9947EL
		DALI		1T9944DA	1T9945DA
				1T9946DA	1T9947DA
DIRECT/INDIRECT 15W	MWFL 42°	ON-OFF		1T9956EL	1T9957EL
				1T9958EL	1T9959EL
		DALI		1T9956DA	1T9957DA
				1T9958DA	1T9959DA

**Note** Accessory codes on page 13.

Accessory codes

LABEL | Codes compatible with the whole range

Control systems

	Code		Code
	1T5349		2T0131
IP20 wireless control unit with DALI interface. More details on page 672.		IP20 Extender for wireless control of LED driver with dimming DALI (or 1-10V) interface based on Casambi technology. More details on page 672.	

# LIGHT MANAGEMENT SYSTEM





# HOW WE CONTROL OUR FIXTURES

## Dali

The fixture is equipped with a driver that provides a connection to a BUS DALI system for overall management of the system.

DALI is the acronym for “Digital Addressable Lighting Interface”, an international standard protocol compliant with IEC EN 62386 that guarantees the interchangeability of dimmable electronic power supplies from different manufacturers. It is used in building automation. It can be used for medium-sized and large projects and entails a preventive design with special cable routing. Many fixtures in the Targetti collection have DALI drivers and are therefore compatible with home automation systems that integrate lighting into building automation.

## Dimm on board

The fixture is dimmed using a commutator located inside it.

The simplest system for dimming light fixtures. A commutator inside the fixtures makes it possible to intervene manually and regulate the intensity of the light emission to modulate the light according to actual project needs.


## CASAMBI

**Targetti Control** powered by Casambi  
Fixtures are controlled via wireless or Bluetooth by a smartphone or a tablet without the need for any other hardware. For Casambi on board fixtures or those equipped with DALI drivers.

LMS is the Targetti home automation lighting control system that makes it possible to manage lighting systems in wireless mode. Designed for both the consumer and professional markets LMS is the result of a combination of components from Casambi, a leading company producing wireless lighting control solutions, and Targetti light fixtures.

## DMX

RGB, RGBW and Tunable White fixtures are controlled using a DMX protocol. Software and touch screen interfaces are available to manage and create static and dynamic lighting scenes.

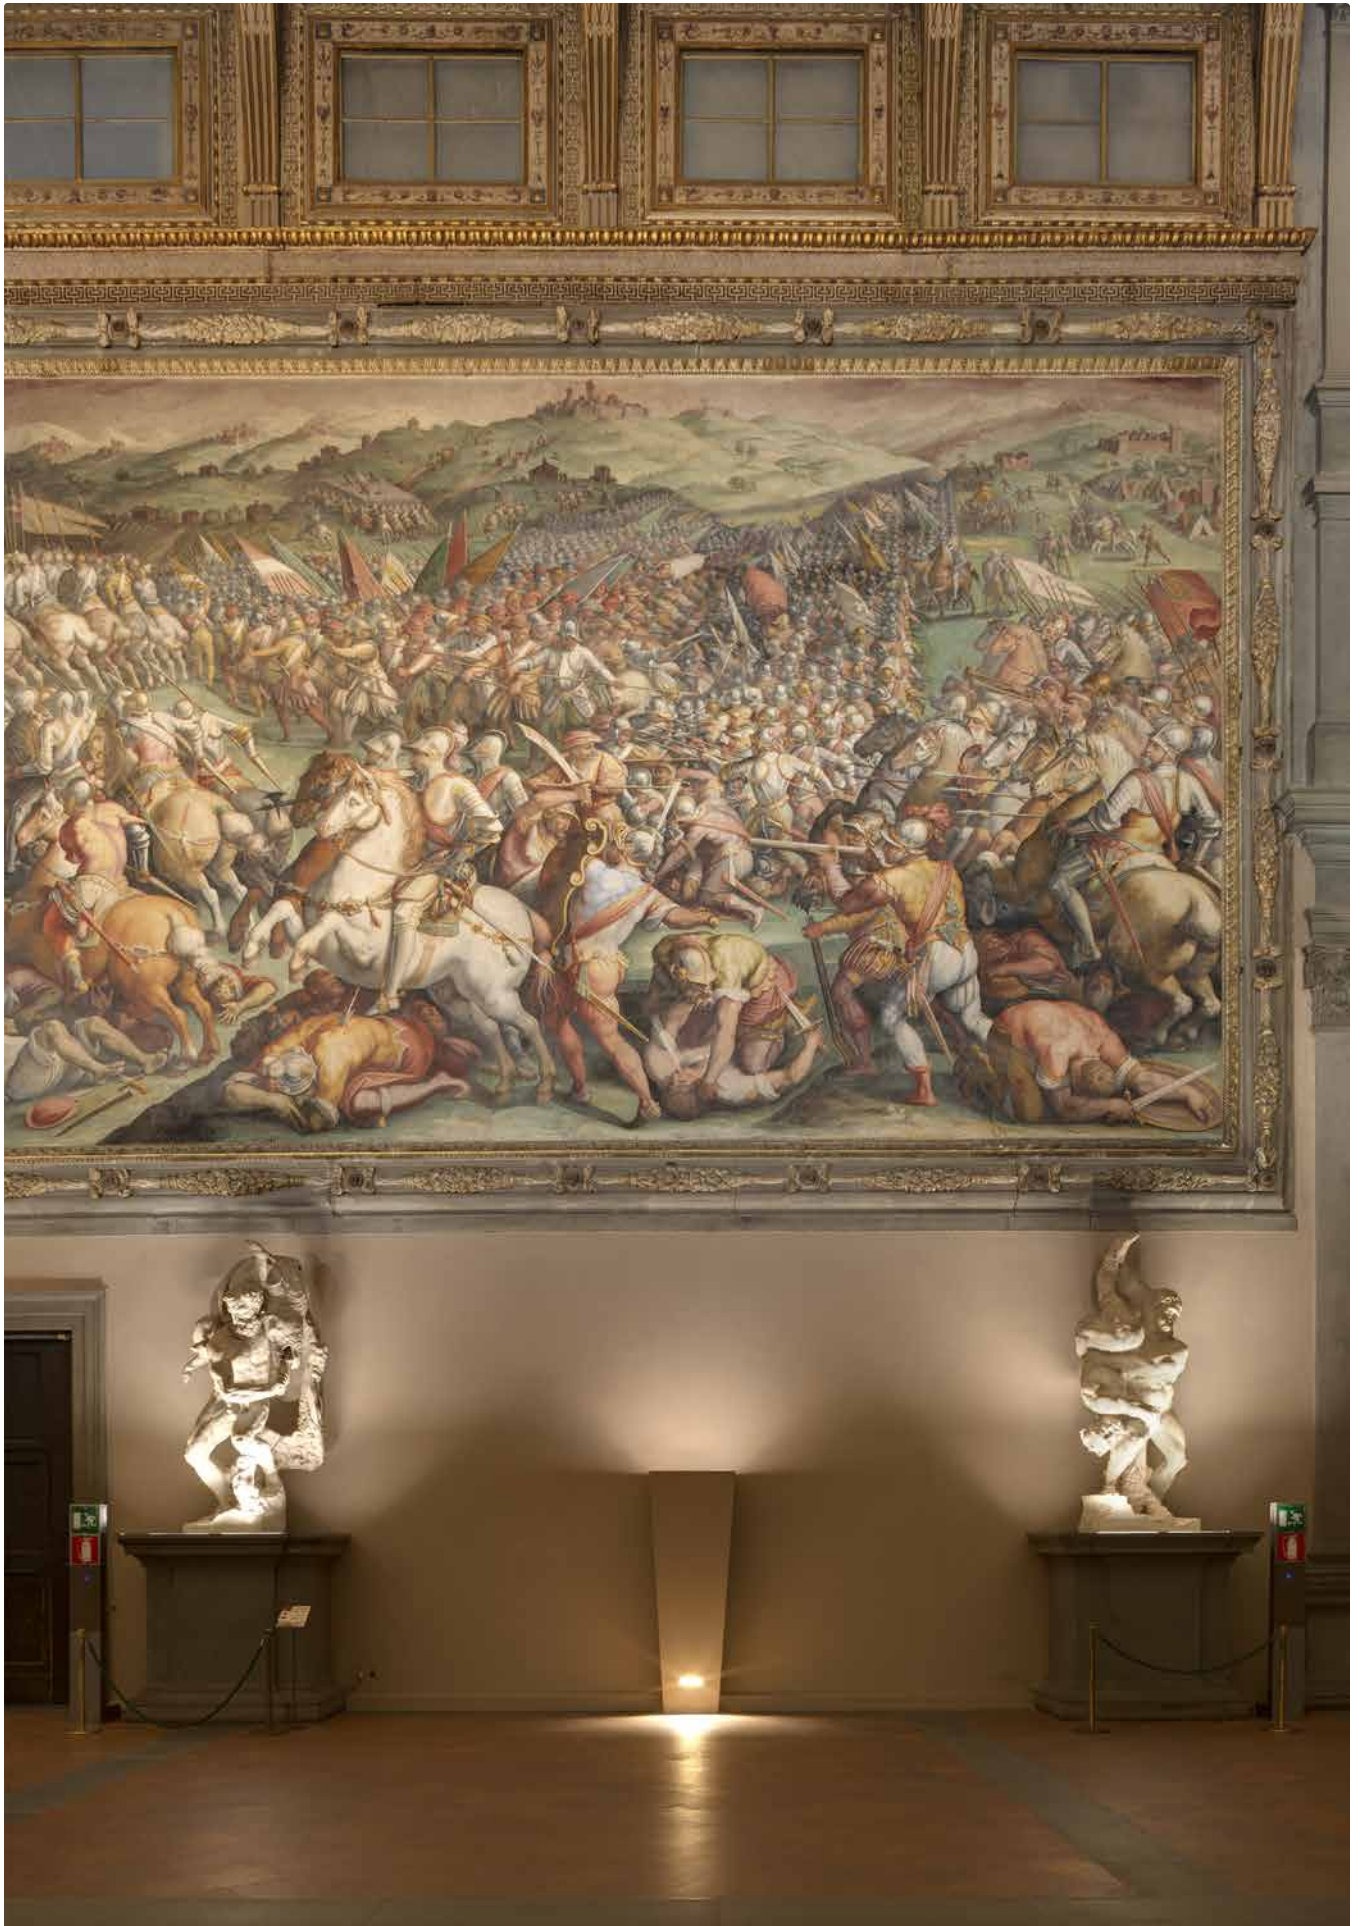

# TARGETTI CONTROL

Powered by Casambi

LMS is the Targetti wireless home automation system that can manage even the most complex lighting systems. Designed for the consumer and the professional market, LMS is the result of the combination of components from Casambi - a leading company producing wireless lighting control solutions - and Targetti light fixtures.

## **iOS and Android apps**

Thanks to the intuitive simplicity of the app developed by Casambi for iOS and Android, LMS ensures system operational readiness. You just need a phone or another mobile device and anyone can create and manage a lighting network singlehandedly by controlling every fixture individually or in groups depending on the needs and the functions required. Managing the system using a standard handset is also made possible with the use of specific accessories.

## **Extreme usability**

The ease of use and programming of the system makes it easy to manage without the use of special control units or assistance from specialised technicians. The application recognises and associates the Targetti

fixtures that are installed in the space automatically by using the BLE (Casambi Bluetooth Low Energy) proprietary protocol to communicate with the various fixtures. No Internet connection is necessary except for synchronisation functions or remote access.


## **Mesh self-healing network**

LMS allows the final user to generate adaptive and multipoint networks: “adaptive” because every fixture can work as a buffer for all the others, adapting automatically to various contexts to optimise control signal propagation; “multipoint” because you can connect up to 250 fixtures on each network without any limit on the number of networks. The result is strong, reliable and affordable networks that manage the system, the profiles of individual fixtures and access rights.





## Installation sequence

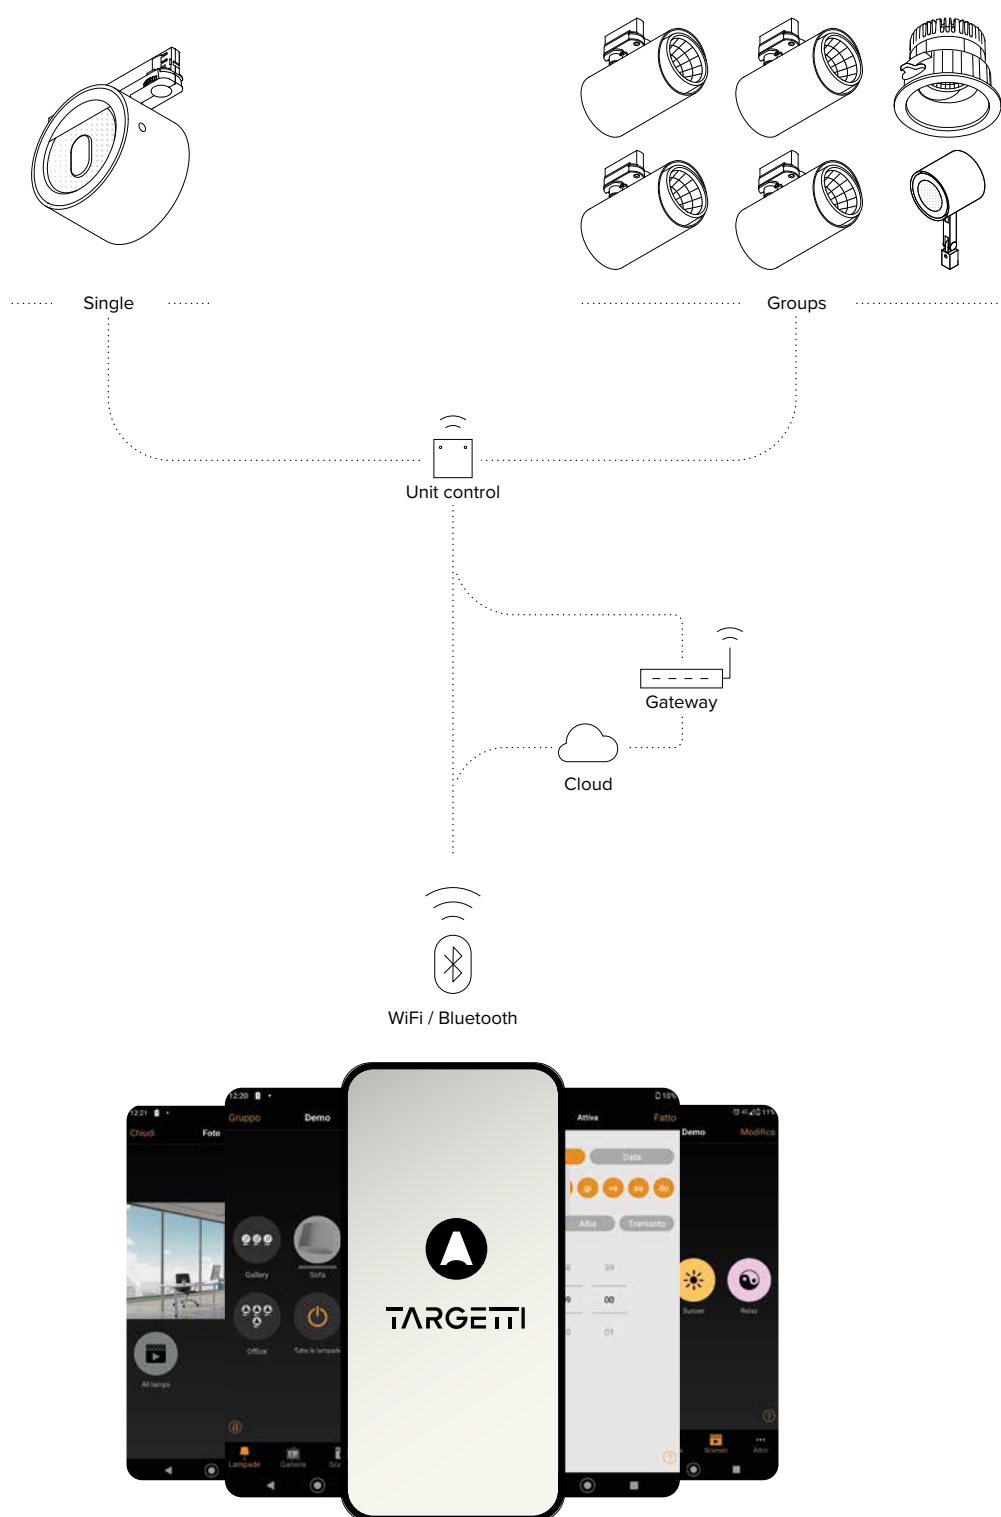

- ① Choose Targetti fixtures by opting for the Targetti Casambi Ready package or Casambi accessory components
- ② Download the Casambi iOS or Android App depending on the device used
- ③ Launch the App: the fixtures in operation will be detected automatically
- ④ Create one or two networks depending on the characteristics of the environment
- ⑤ Create groups of devices as needed
- ⑥ Program scenes and/or sequences.
- ⑦ Set the level of network sharing



**Control Type**  
Casambi control can be done using:

- Buttons and switches (manual control)
- App (manual digital control)
- Sensors and timers (automatic digital control)



**Grouping**  
Different fixtures can be grouped together to be managed all together or individually. Grouping is easy and the same as grouping apps on smart devices.



**Scenes**  
It is possible to:

- create lighting scenes for different occasions;
- manage several fixtures with just one touch to create the perfect atmosphere for specific needs;
- Use the same fixture in different scenes.



**Tunable control**  
Casambi provides complete colour temperature control for those permitted in the range for LED sources. Just swipe your finger over the icon for the source to change the colour temperature.



**Animation**  
It is possible to create dynamic scenes with fades from scene to scene. Animated scenes can be recalled again or repeated as required. It is possible to set both the duration of each scene and fade times between scenes.



**Gallery**  
The exclusive gallery function makes control intuitive. Taking a photo of an environment or uploading a floor plan on the app it is possible to mark the fixtures and then recall them. Images are saved in a special gallery on the app with the fixtures displayed. Users only have to touch the ones they want to manage.



**Gateway**  
With the gateway function it is possible to access a Casambi network remotely. Casambi enabled fixtures can be managed and network settings (administration rights required) can be changed. To enable the remote access feature, an iOS or Android device must act as a gateway on the Casambi network.



**Adaptable**  
The Casambi system is adaptable to both simple as well as more complex projects. It is based on the possibility to create an unlimited number of networks that can be turned on and off.



**Calendar**  
With the calendar and timer function it is possible to activate and deactivate scenes and animated scenes based on parameters such as: timetables, weekly scheduling, seasonality etc. This makes it possible to meet the needs of different users and the environments to be lit. All Casambi units keep track of time.


## Casambi Accessories

External accessories with simple electric cables make it possible to control Targetti fixtures in wireless mode.

For a clear and easy choice for the correct accessories, please refer to the explanatory table on page 26 that shows:

- An alphabetical list of the Targetti fixtures that are compatible with Casambi accessories
  - Product variants that are compatible with Casambi accessories (only some variants of the same product can be controlled by the LMS system)
  - Compatible accessories (descriptions and technical characteristics are listed below)
  - Wiring diagram
- Gateway DALI/Casambi available that allows fixtures fitted with mesh Bluetooth Casambi technology to interface with a traditional DALI system and to be adjusted by a DALI control unit. For further information see the website.

### CONTROL UNIT IP20 - DALI

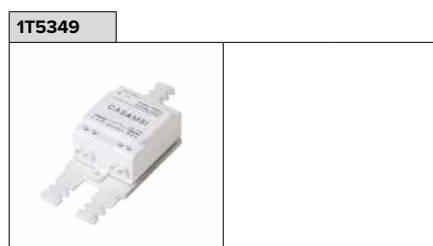


IP20 wireless control unit with DALI interface. It generates a local DALI2 bus, enabling a direct connection to a DALI interface LED driver. The module can only be used in a closed system and cannot be connected to an existing DALI network. The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 5.0 technology. The devices automatically create an adaptive, robust, and reliable wireless mesh network, allowing for the easy and efficient management of a high number of fixtures. The control unit is preset to the DALI 1CH profile, meaning the device can control a single DALI driver with broadcast commands. In addition to the DALI broadcast, other operating modes are available, such as: button (normally open), control unit 0/1-10V, control unit DALI Tunable White DT8, presence sensor.

If different from the preset mode, the desired operating profile must be set directly by the user before coupling the control unit to the Casambi network.

Power supply	220-240 VAC
Power	1,1W - PF 0,6
Max current	0,6 Amp AC
Max n. DALI driver	1
Max n. 1-10v driver	1
Dimensions	102x25x36mm
Exit	1-10V / DALI

### EXTENDER IP20 - DALI

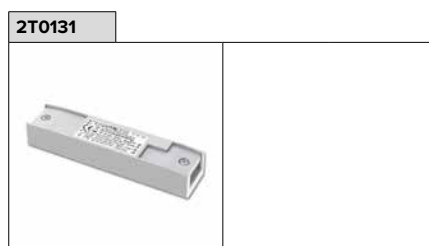

IP20 Extender for wireless control of LED driver with dimming DALI (or 1-10V) interface based on Casambi technology. It has a DALI2 output with the capacity to control up to 40 lighting fixtures. With the addition of a further external BUS DALI power supply it is possible to control up to 64 fixtures. IP20 Extender is preset to the DALI broadcast profile, meaning all the luminaires connected to it are dimmable at the same level. In addition to the DALI broadcast other operating modes are available, such as: Extender DALI 8CH, Extender DALI Tunable White, Extender 0/1-10V, Extender DALI 4CH, Extender DALI DT8 Tunable White.

If different from the preset mode, the desired operating profile must be set directly by the user before coupling the extender to the Casambi network.

Power supply	100-240 VAC
Power	2,7W - PF 0,6
Max current	6 Amp AC
Max n. DALI driver	64
Max n. 1-10v driver	30
Dimensions	130x22x30mm.

### CONTROL MODULE IP67 - DALI



IP67 wireless control unit with DALI interface. It generates a local DALI2 bus, enabling a direct connection to a DALI interface LED driver. The module can only be used in a closed system and cannot be connected to an existing DALI network. The module is wireless controlled using a Casambi app for smartphones and tablets using Bluetooth 5.0 technology. The devices automatically create an adaptive, robust, and reliable wireless mesh network, allowing for the easy and efficient management of a high number of fixtures. The control unit is preset to the DALI 1CH profile, meaning the device can control a single DALI driver with broadcast commands.

In addition to the DALI broadcast, other operating modes are available, such as: button (normally open), control unit 0/1-10V, control unit DALI Tunable White DT8, presence sensor.

If different from the preset mode, the desired operating profile must be set directly by the user before coupling the control unit to the Casambi network.

Power supply	100-240 VAC
Power	1,1W - PF 0,6
Max current	0,6 Amp AC
Max n. DALI driver	1
Max n. 1-10v driver	1
Dimensions	108x28x65mm.



#### EXTENDER IP67 - DALI

1E4369



IP67 Extender for wireless control of LED driver with dimming DALI interface based on Casambi technology. It has a DALI2 output with the capacity to control up to 40 lighting fixtures. With the addition of a further external BUS DALI power supply it is possible to control up to 64 fixtures. IP67 Extender is preset to the DALI broadcast profile, meaning all the luminaires connected to it are dimmable at the same level. In addition to the DALI broadcast other operating modes are available, such as: Extender DALI 8CH, Extender DALI Tunable White, Extender DALI 4CH, Extender DALI DT8 Tunable White. If different from the preset mode, the desired operating profile must be set directly by the user before coupling the extender to the Casambi network.

Power supply	100-240 VAC
Power	2,7W - PF 0,6
Max current	6 Amp AC
Max n. DALI driver	64
Max n. 1-10v driver	30
Dimensions	148x40x150mm

#### XPRESS

1T5350

Black

2T0132

White



Xpress is a wall mounted wireless user interface; it can be installed wherever the user chooses thanks to battery power with autonomy of 2-3 years providing direct access to all the most important CASAMBI system control functions. As well as switching the fixtures on and off, Xpress controls dimming, colour temperature change in fixtures equipped with this technology, and control of individual fixtures and lighting scene or sequence management.

Dimensions	90x12x90mm
------------	------------

#### BRIDGE DALI/CASAMBI

1T8173CA













































Bridge DALI/Casambi: a fixture that allows fixtures equipped with mesh Bluetooth Casambi to interface with a traditional DALI system and to be adjusted by a DALI control unit. Inside the usual DALI circuit it is possible to have a maximum of 64 cabled DALI and Casambi wireless devices. It only works with Casambi Evolution networks.

The DALI Bridge is transparent in the DALI system, and therefore does not require an address. There is no need for a power supply given that it is supplied directly by the DALI bus. To provide IP68 rating to the fixture complete with code 1E3184.

Dimensions	40,4x14x36,3mm
------------	----------------



## Quadro sinottico accessori Casambi

Product	Variant	1T5349 Control module IP20	2T0131 Extender IP20	1E3048 Control module IP67	1E4369 Extender IP67	Schema Pag. 28
 <b>BEBOP RECESSED</b>	DALI Version	●	●			01 - 02
 <b>CCTEVO ARCHITECTURAL</b>	DALI Version	●	●			01 - 02
 <b>CCTEVO DOWNLIGHT</b>	DALI Version	●	●			01 - 02
 <b>CCTEVO TUBE</b>	DALI Version	●	●			01 - 02
 <b>CCTEVO EXTRACTABLE</b>	DALI Version	●	●			01 - 02
 <b>CCTEVO WW</b>	DALI Version	●	●			01 - 02
 <b>CCTLED DOWNLIGHT</b>	DALI Version	●	●			01 - 02
 <b>CORO</b>	With DALI driver	●	●			01 - 02
 <b>DART</b>	DALI Version			●	●	03 - 04
 <b>DART ROUND</b>	DALI Version			●	●	03 - 04
 <b>FEBO EVO</b>	DALI Version			●	●	03 - 04
 <b>FORTYEIGHT LABEL</b>	DALI Version		●			02
 <b>FORTYEIGHT LOGICO 30</b>	DALI Version		●			02
 <b>HALL</b>	DALI Version	●	●			01 - 02
 <b>JEDI</b>	DALI Version			●	●	03 - 04
 <b>JEDI RECESSED</b>	DALI Version			●	●	03 - 04
 <b>JEDI COMPACT INDOOR</b>	DALI Version	●	●			01 - 02
 <b>JEDI COMPACT OUTDOOR</b>	DALI Version			●	●	03 - 04
 <b>JEDI COMPACT OUTDOOR RECESSED</b>	DALI Version			●	●	03 - 04
 <b>JUPITER PRO</b>	With DALI controller			●	●	03 - 04
 <b>KEPLERO 160 - KEPLERO 280</b>	DALI Version			●	●	03 - 04

Product	Variant	1T5349 Control module IP20	2T0131 Extender IP20	1E3048 Control module IP67	1E4369 Extender IP67	Schema Pag. 28
 <b>KEPLERO 50 - KEPLERO 80</b>	With DALI controller			●	●	03 - 04
 <b>LABEL 230V</b>	DALI Version	●	●			01 - 02
 <b>LABEL</b>	DALI Version		●			02
 <b>LOGICO EASY STAND ALONE</b>	DALI Version	●	●			01 - 02
 <b>LOGICO EASY SYSTEM</b>	DALI Version	●	●			01 - 02
 <b>LOGICO SYSTEM</b>	DALI Version	●	●			01 - 02
 <b>MR. BO</b>	DALI Version			●	●	03 - 04
 <b>MRS. BO BOLLARD</b>	DALI Version			●	●	03 - 04
 <b>MRS. BO WALL</b>	With DALI controller			●	●	03 - 04
 <b>MRS. BO PATH</b>	With DALI controller			●	●	03 - 04
 <b>MR. SMITH</b>	DALI Version			●	●	03 - 04
 <b>MRS. SMITH</b>	DALI Version			●	●	03 - 04
 <b>OMEGA</b>	DALI Version	●	●			01 - 02
 <b>OZ STAND ALONE CEILING</b>	DALI Version	●	●			01 - 02
 <b>OZ STAND ALONE RECESSED</b>	With DALI driver	●	●			01 - 02
 <b>THREESIXTY</b>	DALI Version	●	●			01 - 02
 <b>VOLTA</b>	With DALI driver	●	●	●	●	01 - 02 03 - 04
 <b>ZEDGE - ZEDGE BOLLARD</b>	With DALI controller			●	●	03 - 04
 <b>ZEDGE LINE</b>	DALI Version and with DALI controller			●	●	03 - 04
 <b>ZEDGE PRO</b>	DALI Version			●	●	03 - 04
 <b>ZENO APPLIQUE</b>	DALI Version	●	●			01 - 02

Wiring diagrams

01	1T5349	<p>Single DALI control IP20</p>
02	2T0131	<p>DALI multiple control IP20</p>
03	1E3048	<p>DALI single control IP67</p>

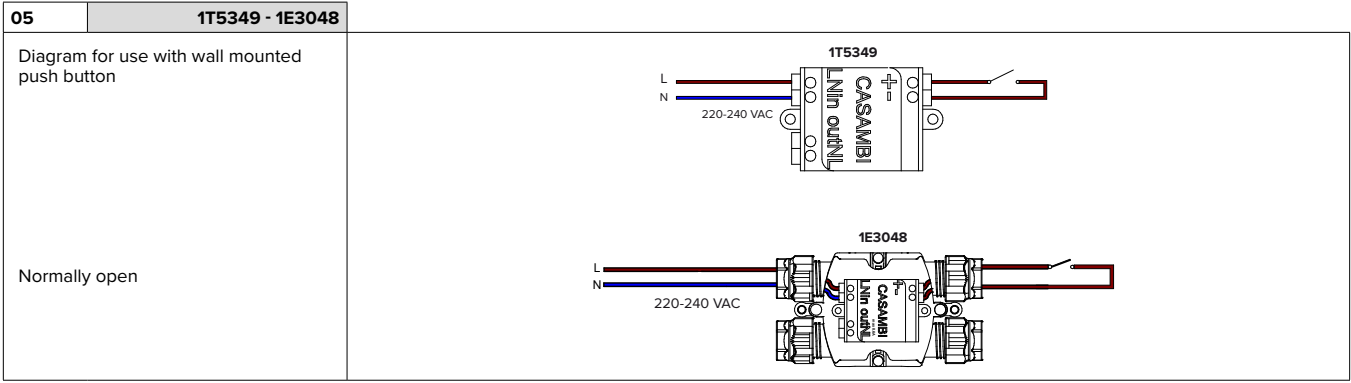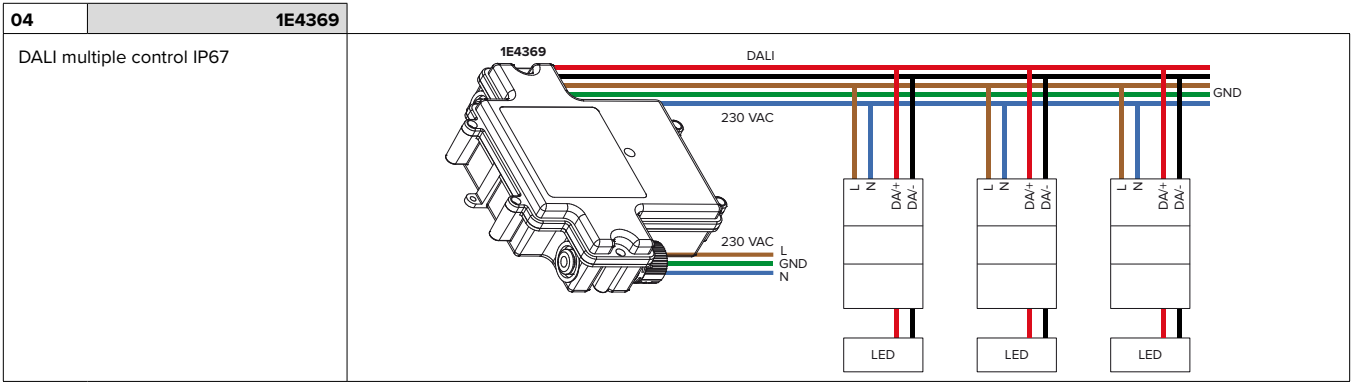

# DMX

Control system for DMX, Tunable White and RGBW fixtures

For programming and control RGBW fixtures use the DMX 512 digital protocol, the most widespread and proven standard for smart light control. This allows for complete compatibility with other fixtures on the market and makes a wide variety of accessories available at a reasonable cost.

## **Fixtures Power Supply**

RGBW fixtures need special power supplies with PWM (Pulse Width Modulation) technology that makes it possible to regulate the light intensity separately of primary colours. In larger RGBW products the integrated electronic power supply is always combined with the one used for dynamic control (DMX); in this case the fixtures are self-sufficient and defined as “smart”; smaller fixtures on the other hand require an external device that can power and control several fixtures at the same time.

RGBW fixtures are compatible with the DMX – RDM protocol that allows for remote programming via the data line.





## mySCENARIO

Systems of digital devices designed to control dynamic lighting fixtures and to programme dynamic light scenarios and sequences. The system consists of an intuitive software, compatible with Windows operating systems, able to control different hardware devices having the following functions:

- recording colour-changing scenarios set by the operator;
- allowing the selection among the multiple scenarios recorded;
- transmitting the control signals to the lighting system.

The software is interfaced to the PC through a USB port; the interface with lighting fixtures is featured through a DMX 512 output.

The software provides a graphic simulation of the operating keys of lighting controller; the

patching function allows to assign the DMX control channels to the fixtures by using the internal library.


The Colour Manager function allows a quick and intuitive programming of a RGB light show, consisting of several steps with assigned duration and fading times. The programmed light shows can be transferred to the different control interfaces.

### MYSCENARIO SHOW STORE

1T1898

Software + USB interface
Storage, via USB, of light-shows created through mySCENARIO software
Automatic stand-alone operation with non need of a PC or any other external driver
Keys for scrolling through programmed sequences
Digital display to show the number (1-99) of active scene
Led indicators for ON/OFF status
Three poles XLR output – DMX signal to lighting fixtures
XLR input for daisy chain connection to other identical unit
Management of 512 DMX channels (512 parameters to be programmed separately)
Memory dedicated to light shows proportional to number of connected channels (2877 with 20 channels; 2877 with 60 channels; 355 with 512 channels)

### TYPICAL WIRING LAYOUT

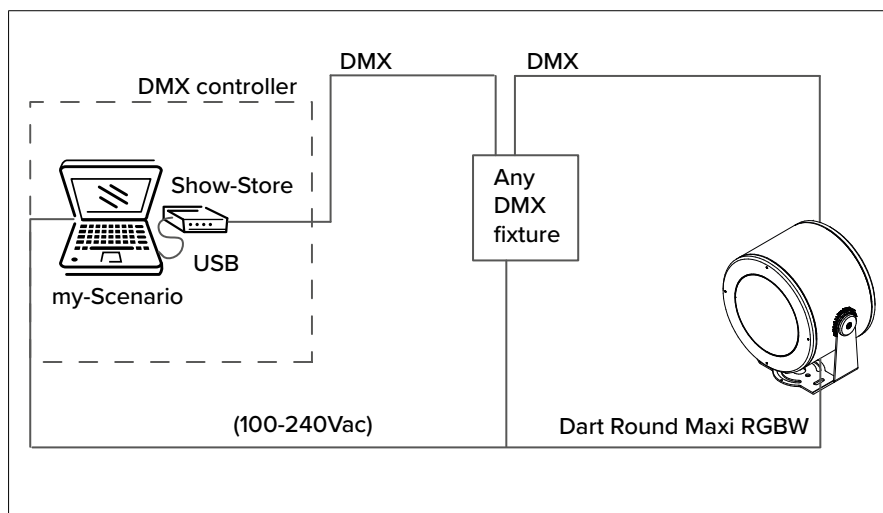



# mySCENARIO Wall

DMX controller with a glass touch sensitive screen for architectural applications.

- It can control two different DMX universes (2x 512 channels).
- Stand alone function or connected to a computer using a USB port.
- Software for creating scenarios (that can be downloaded from the Targetti website) is included.
- It can manage 10 different lighting zones and 50 scenarios per zone.
- The touch keys on the front make it possible to modify and recall programmed scenarios.
- USB cable included.
- To be used with all RGBW products.

## MYSCENARIO WALL

1T6499	
	
Power supply	6 Vdc
Output	4W
Memory	SD card
DMX Channels	2 x 511
Operating system	Windows 32/64bit
Dimensions	146 x 106 x 11 mm


# USB-RDM Programmer code

DMX-RDM (Remote Device Management) address planner.

Used with the “RDM Targetti” software that can be downloaded for free from the Targetti website download section.

To be used with all RGBW products.

## USB – RDM

1E2767	
	



**TARGETTI SANKEY Srl**  
Certificated ISO 9001 n° 9130. TAR1  
Certificated ISO 14001 n° IT319206

The Enec mark, ISO9001 and ISO14001 certifications and the CE marking all guarantee that the activities carried out internally in the company are governed and controlled by procedures which assure constant level of quality.

Accredited laboratory in accordance with ISO 17025.

#### **Requisites and information**

All fixtures of the Targetti collection have been designed and produced to comply with European Standard EN60598-1 relative to the safety requisite of light fixtures.



All fixtures comply with the following directives:

- EMC Directive 2014/30/EU
- LV Directive 2014/35/EU
- RoHS Directive 2011/65/EU

#### **Unless specified otherwise**

- all fixtures are supplied without lamps;
- all fixtures are sold separately;
- all measurements are expressed in millimeters;
- all fixtures at low voltage are supplied without transformer;
- For products in Class III performance is only guaranteed using the electronic power supplies and drivers indicated in the catalogue.



Targetti offers a five years warranty on the products that use LED light sources included in the Catalogues (unless otherwise specified).

The extension of guarantee does not apply to products with traditional light bulbs, to all the products for light management and control systems, both by Targetti and those by third parties, or to Targetti products fitted with 230V LED modules. For products fitted with traditional bulbs / LED bulbs, the warranty extension is valid only for the lighting product. The five years warranty is valid from the invoice date and covers any manufacturing and/or material defect found in products, if they are used in accordance with their intended use. The warranty terms are available on the Extension of guarantee.









#### **Consorzio ecolight**

Targetti Sankey Srl is a member of the Ecolight consortium that was set up in 2004 (D.Lgs. 49/2014) to comply with the provisions of the European Directive that was adopted in Italy as the European Directive 2012/19/EU for WEEE on managing, recovering and treating waste electrical and electronic equipment, used batteries and accumulators in compliance with all applicable legislation.










The colors of the products illustrated are reproduced as faithfully as possible compatibly with the technical limitations of the printed medium.

The company reserves the right to make changes to the production without notice. Reproduction of this catalogue or any part of it is prohibited. The products illustrated in this catalogue are covered by one or more Italian or international patents. The company will take legal action against any imitators.

## Icons legend

	Class I luminaire in which the protection against electrical shock is guaranteed by the connections of the conductive elements accessible to a protective conductor (earth connection).
	Luminaire in which the connection to a protective conductor (earth connection) guarantees the immunity to radio noises.
	Class II luminaire (double insulation), protected against the accidental contact with parts under tension from the user.
	Class III luminaire, suitable for connection to very low voltage circuits.
	Solid particle and liquid ingress protection degree.
	Protection degree - Recessed part . Protection degree - Exposed part.
	Impact protection degree.
	ENEC European Norms Electrical Certification.

## Particular symbols

	Weight of the single fixture
	Cable length
	Walk-over
	Driver-over safe
	Fixtures that have parameters below the minimum visibility threshold $PstLM \leq 1$ and $SVM \leq 0.4$ (IEC TR 61547-1 and IEC TR 63158).
	Casambi with accessories
	Casambi ready
	DMX on board
	DBS (Dynamic Beam Shaping) optic system

## Light beam apertures

Optics	Optic description	from	to
NSP	Narrow Spot	5°	10°
SP	Spot	11°	21°
FL	Flood	22°	40°
MWFL	Medium Wide Flood	41°	50°
WFL	Wide Flood	51°	70°
VWFL	Very Wide Flood	71°	120°
WW	Wall Washer		
ASY	Asymmetric		
FW	Floor Washer		
ELL	Elliptical		
ELT	Elliptical Transversal		
AMB	Ambient		
OPL	Opal		
GRZ	Grazing		
UGR	UGR		
ZOOM	Zoom		
DBS	Dynamic Beam Shaping		

### Note

- Please contact us for on demand treatments and versions.
- The performances reported on the products refer to the use of the recommended drivers.
- The drivers selected by Targetti make the fixtures "Safe Flicker".

