

# Projectors

## EUROSTANDARD PLUS




**TARGETTI**


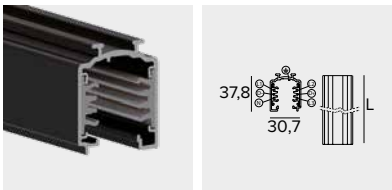




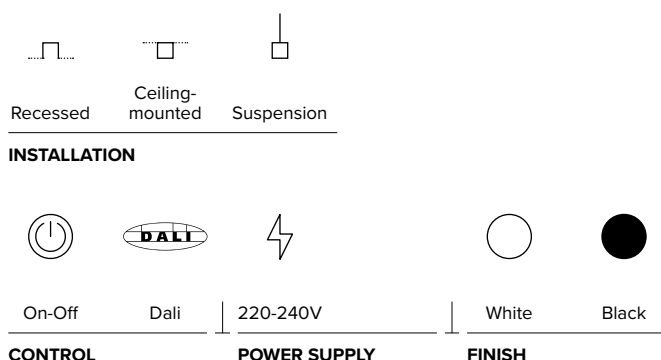

# EUROSTANDARD PLUS



Eurostandard Plus is the universal 230V track compatible with projectors in the Targetti collection and with all projectors compliant with European standards. There are two versions available, standard and recessed in three different lengths. The standard version for ceiling-mounted and suspension installation needs special end caps and a mounting system. The electrical connectors in different shapes and configurations make it possible to create infinite compositions. The three-phase mixed system includes two additional conductors to manage any type of signal (DALI, DMX, etc...).



**EUROSTANDARD PLUS Standard**  
440Vac

 	L mm	Kg	Colour	Code
	1000	1.1		9000A-1/W-ST
				9000A-1/B-ST
	2000	1.71		9000A-2/W-ST
				9000A-2/B-ST
	3000	3.3		9000A-3/W-ST
				9000A-3/B-ST

**Note** Related codes and accessory codes on page 3.

**EUROSTANDARD PLUS Recessed**  
440Vac

 	L mm	Kg	Colour	Code
	1000	1.1		9000-1/W-R
				9000-1/B-R
	2000	2.2		9000-2/W-R
				9000-2/B-R
	3000	3.3		9000-3/W-R
				9000-3/B-R

**Note** Related codes and accessory codes on page 3.



**Related codes and accessories**  
EUROSTANDARD PLUS

**Related codes**


**End Caps**



	Colour	Code		Colour	Code
		9004/W			9004-R/W
		9004/B			9004-R/B
Dead end - Standard.			Dead end - recessed.		

**Mounting System**


	Code		Code
	S-9000KIT		S-9000/111
Suspension kit. L=2000mm		Ceiling mounting bracket. Galvanized steel.	



**Power Supply**




Colour	Code
	9001/W
	9001/B



Lateral power supply.  
Polarity on the right.



Colour	Code
	9002/W
	9002/B

Lateral power supply.  
Polarity on the left.



Colour	Code
	9001-MF/W
	9001-MF/B




Intermediate power supply

## Related codes and accessories



### EUROSTANDARD PLUS

#### Accessory codes


##### End Caps

	Colour	Code
		S-9001/115-W
		S-9001/115-B
Seal for lateral power supply. PVC. For: 9001/...; 9002/...		




##### Bracket




	Colour	Code
		S-9000/123
Rigid support bracket for suspended installation.		




##### Tool




	Code
	S-9000/T
Tool for shearing conductors, to be used if necessary to cut the track during installation.	




#### Electrical Connector




	Colour	Code
		9010/W
		9010/B
Direct linear joint.		




	Colour	Code
		9003/W
		9003/B
Pass-through linear joint.		




	Colour	Code
		9018/W
		9018/B
Flexible joint.		




	Colour	Code
		9011/W
		9011/B
L joint. Internal polarity.		




	Colour	Code
		9012/W
		9012/B
L joint. External polarity.		

	Colour	Code
		9013/W
		9013/B
T joint. External polarity and on the left.		




	Colour	Code
		9014/W
		9014/B
T joint. External polarity and on the right.		

	Colour	Code
		9015/W
		9015/B
T joint. Internal polarity and on the left.		




	Colour	Code
		9016/W
		9016/B
T joint. Internal polarity and on the right.		

	Colour	Code
		9017/W
		9017/B
X joint.		

#### Mounting System

	Colour	Code
		S-9000/M-W-KIT
		S-9000/M-B-KIT
Adapter for suspension installation.		

#### Adapter




	Colour	Code
		9009/W
		9009/B
Adapter for power supply. Allows for power supply from a Eurostandard Plus track. EL/DALI.		




Related codes and accessories




EUROSTANDARD PLUS




Accessory codes




Cover Panel | Recessed installation

	Colour	Code
		<b>S-9001-R/6-W</b>
		<b>S-9001-R/6-B</b>
False ceiling cover for lateral power supply. Recessed installation. Polycarbonate body. For: 9001/...; 9002/...		




	Colour	Code
		<b>S-9010-R/6-W</b>
		<b>S-9010-R/6-B</b>
False ceiling cover for central power supply. Recessed installation. Polycarbonate body. For: 9010/...		

	Colour	Code
		<b>S-9011-R/6-W</b>
		<b>S-9011-R/6-B</b>
False ceiling cover for L connector. Recessed installation. Polycarbonate body. For: 9011/...; 9012/...		

	Colour	Code
		<b>S-9013-R/6-W</b>
		<b>S-9013-R/6-B</b>
False ceiling cover for T connector. Recessed installation. Polycarbonate body. For: 9013/...; 9014/...; 9015/...; 9016/...		



	Colour	Code
		<b>S-9017-R/6-W</b>
		<b>S-9017-R/6-B</b>
False ceiling cover for X connector. Recessed installation. Polycarbonate body. For: 9017.		

Cover Profile


	L mm	Colour	Code
	1000		<b>S-9000/GP-W</b>
	1000		<b>S-9000/GP-B</b>
Cover profile. Can be cut to size. For Eurostandard Plus Standard and Recessed.			

**Electrical scheme**

During the wiring the electrical scheme of picture must be followed.

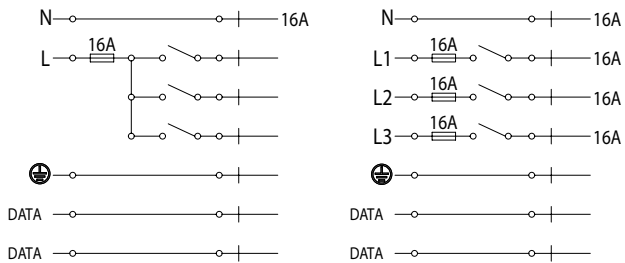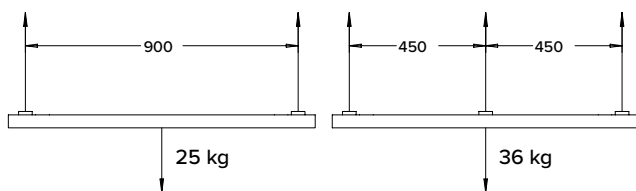
**Load scheme****Installation**

There is a polarity on the lighting track to guarantee the right connection of the multiple pieces of the track. Also end-feeds and connection joints have a polarity that must be taken into account in order to choose the right component. In the catalogue sketches of this articles, the position of the polarity is highlighted with a red line.

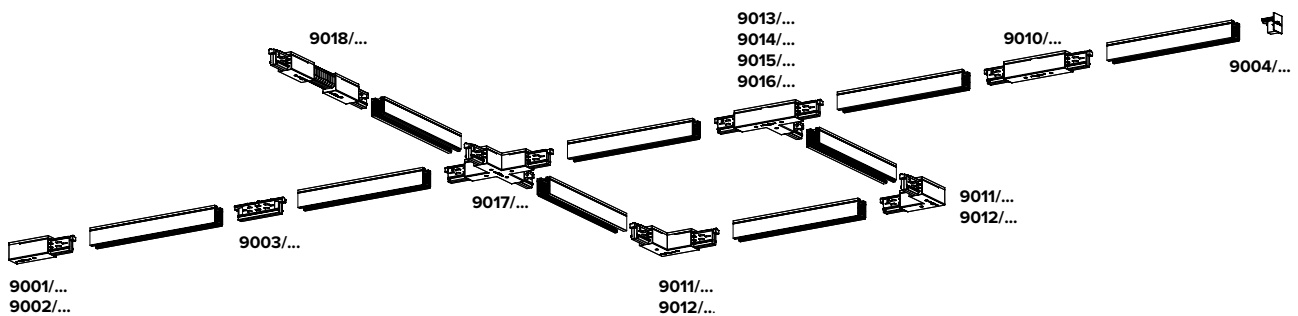


**Lateral power supplies**

.....




9001/...



9002/...

**Central power supplies**


.....




9010/...

**“L” joint**

.....




9011/...




9012/...

**“T” joint**


.....




9013/...



9014/...




9015/...



9016/...

**“X” joint**

.....



9017/...



**TARGETTI SANKEY Srl**  
Certificated ISO 9001 n° 9130. TAR1  
Certificated ISO 14001 n° IT319206

The Enec mark, ISO9001 and ISO14001 certifications and the CE marking all guarantee that the activities carried out internally in the company are governed and controlled by procedures which assure constant level of quality.

Accredited laboratory in accordance with ISO 17025.

#### **Requisites and information**

All fixtures of the Targetti collection have been designed and produced to comply with European Standard EN60598-1 relative to the safety requisite of light fixtures.



All fixtures comply with the following directives:

- EMC Directive 2014/30/EU
- LV Directive 2014/35/EU
- RoHS Directive 2011/65/EU

#### **Unless specified otherwise**

- all fixtures are supplied without lamps;
- all fixtures are sold separately;
- all measurements are expressed in millimeters;
- all fixtures at low voltage are supplied without transformer;
- For products in Class III performance is only guaranteed using the electronic power supplies and drivers indicated in the catalogue.



Targetti offers a five years warranty on the products that use LED light sources included in the Catalogues (unless otherwise specified).

The extension of guarantee does not apply to products with traditional light bulbs, to all the products for light management and control systems, both by Targetti and those by third parties, or to Targetti products fitted with 230V LED modules. For products fitted with traditional bulbs / LED bulbs, the warranty extension is valid only for the lighting product. The five years warranty is valid from the invoice date and covers any manufacturing and/or material defect found in products, if they are used in accordance with their intended use. The warranty terms are available on the Extension of guarantee.

#### **Consorzio ecolight**









Targetti Sankey Srl is a member of the Ecolight consortium that was set up in 2004 (D.Lgs. 49/2014) to comply with the provisions of the European Directive that was adopted in Italy as the European Directive 2012/19/EU for WEEE on managing, recovering and treating waste electrical and electronic equipment, used batteries and accumulators in compliance with all applicable legislation.

The colors of the products illustrated are reproduced as faithfully as possible compatibly with the technical limitations of the printed medium.










The company reserves the right to make changes to the production without notice. Reproduction of this catalogue or any part of it is prohibited. The products illustrated in this catalogue are covered by one or more Italian or international patents. The company will take legal action against any imitators.



## Icons legend

	Class I luminaire in which the protection against electrical shock is guaranteed by the connections of the conductive elements accessible to a protective conductor (earth connection).
	Luminaire in which the connection to a protective conductor (earth connection) guarantees the immunity to radio noises.
	Class II luminaire (double insulation), protected against the accidental contact with parts under tension from the user.
	Class III luminaire, suitable for connection to very low voltage circuits.
	Solid particle and liquid ingress protection degree.
	Protection degree - Recessed part . Protection degree - Exposed part.
	Impact protection degree.
	ENEC European Norms Electrical Certification.

## Particular symbols

	Weight of the single fixture
	Cable length
	Walk-over
	Driver-over safe
	Fixtures that have parameters below the minimum visibility threshold $PstLM \leq 1$ and $SVM \leq 0.4$ (IEC TR 61547-1 and IEC TR 63158).
	Casambi with accessories
	Casambi ready
	DMX on board
	DBS (Dynamic Beam Shaping) optic system

## Light beam apertures

Optics	Optic description	from	to
NSP	Narrow Spot	5°	10°
SP	Spot	11°	21°
FL	Flood	22°	40°
MWFL	Medium Wide Flood	41°	50°
WFL	Wide Flood	51°	70°
VWFL	Very Wide Flood	71°	120°
WW	Wall Washer		
ASY	Asymmetric		
FW	Floor Washer		
ELL	Elliptical		
ELT	Elliptical Transversal		
AMB	Ambient		
OPL	Opal		
GRZ	Grazing		
UGR	UGR		
ZOOM	Zoom		
DBS	Dynamic Beam Shaping		

### Note

- Please contact us for on demand treatments and versions.
- The performances reported on the products refer to the use of the recommended drivers.
- The drivers selected by Targetti make the fixtures "Safe Flicker".

