

Inground

MERCURE
















TARGETTI


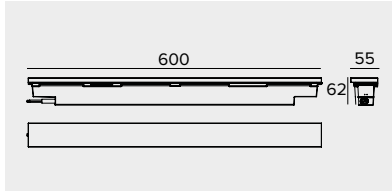


MINI MERCURE



Inground recessed linear drive-over fixture for outdoor environments. The compact size and the flush “all glass” finish allow for particularly aesthetically clean and elegant continuous row installations. The body is subject to cataphoresis treatment which makes it suitable for installation near the sea (up to 5 metres) or in “hostile” environments.

						
Inground recessed	Soft controlled	3000K	4000K			
INSTALLATION	LIGHT	COLOUR TEMPERATURE				
						
On-Off	220-240V integrated 24V remote	Drive-over	Walk-over	IK08	IP66 IP67	IP68 IP69
CONTROL	POWER SUPPLY	RESISTANCE		PROTECTION RATING		
						
Glass	Ra90					
FINISH	ON REQUEST					

MINIMERCURE LED
Ra80 | Fixture flux 3000K 290lm



<div> <div>1.8</div> <div>IP66</div> <div>IP67</div> <div>IP68</div> <div>IP69</div> <div>IK08</div> <div>1.5m</div> <div></div> <div></div> </div>  	Optic	Insulation	Power supply	Driver	Colour	3000K	4000K
	VWFL 8W	CLASS 3	24Vdc			1E3406	1E3407
	VWFL 10W	CLASS 2	220-240Vac	ON-OFF		1E3404	1E3405

Note 24Vdc version: values related to the power consumption of the fixture do not take into account the consumption of the accessory driver, which depends on the choice of driver.
 IP68: the projector is not suitable for permanent underwater installation but can withstand temporary accidental immersion to a depth of 2 metres (max.24h).
 IP69: IEC/EN 60529 standard compliant.
 Related codes and accessory codes on page 3.


Related codes and accessories
MINIMERCURE LED

Related codes

Insertion Box


	Code		Code
	1E2382		1E2383
	Aluminium insertion boxes with horizontal or vertical development pre-set with removable end caps for installations in continuous rows. Complete with internal supports for installations in concrete. Vertical. L=601mm.		Aluminium insertion boxes with horizontal or vertical development pre-set with removable end caps for installations in continuous rows. Complete with internal supports for installations in concrete. Horizontal L=601mm.

Power Supply

	Dimensions LxHxP mm	Power	Power supply	Output voltage	IP	Code
	140x32x63	75W	220-240Vac	24Vdc	IP67	1T3586
	Electronic power supply.					

Accessory codes

Surge protector

	Code
	A013B
	Surge protector compatible with CLASS II lighting fixtures and electronic drivers. Operating voltage 220-240Vac. SPD type 2+3. Max surge protection 10kV. CLASS II IP67



TARGETTI SANKEY Srl
Certificated ISO 9001 n° 9130. TAR1
Certificated ISO 14001 n° IT319206

The Enec mark, ISO9001 and ISO14001 certifications and the CE marking all guarantee that the activities carried out internally in the company are governed and controlled by procedures which assure constant level of quality.

Accredited laboratory in accordance with ISO 17025.

Requisites and information

All fixtures of the Targetti collection have been designed and produced to comply with European Standard EN60598-1 relative to the safety requisite of light fixtures.



All fixtures comply with the following directives:

- EMC Directive 2014/30/EU
- LV Directive 2014/35/EU
- RoHS Directive 2011/65/EU

Unless specified otherwise

- all fixtures are supplied without lamps;
- all fixtures are sold separately;
- all measurements are expressed in millimeters;
- all fixtures at low voltage are supplied without transformer;
- For products in Class III performance is only guaranteed using the electronic power supplies and drivers indicated in the catalogue.



Targetti offers a five years warranty on the products that use LED light sources included in the Catalogues (unless otherwise specified).

The extension of guarantee does not apply to products with traditional light bulbs, to all the products for light management and control systems, both by Targetti and those by third parties, or to Targetti products fitted with 230V LED modules. For products fitted with traditional bulbs / LED bulbs, the warranty extension is valid only for the lighting product. The five years warranty is valid from the invoice date and covers any manufacturing and/or material defect found in products, if they are used in accordance with their intended use. The warranty terms are available on the Extension of guarantee.









Consorzio ecolight

Targetti Sankey Srl is a member of the Ecolight consortium that was set up in 2004 (D.Lgs. 49/2014) to comply with the provisions of the European Directive that was adopted in Italy as the European Directive 2012/19/EU for WEEE on managing, recovering and treating waste electrical and electronic equipment, used batteries and accumulators in compliance with all applicable legislation.










The colors of the products illustrated are reproduced as faithfully as possible compatibly with the technical limitations of the printed medium.

The company reserves the right to make changes to the production without notice. Reproduction of this catalogue or any part of it is prohibited. The products illustrated in this catalogue are covered by one or more Italian or international patents. The company will take legal action against any imitators.

Icons legend

	Class I luminaire in which the protection against electrical shock is guaranteed by the connections of the conductive elements accessible to a protective conductor (earth connection).
	Luminaire in which the connection to a protective conductor (earth connection) guarantees the immunity to radio noises.
	Class II luminaire (double insulation), protected against the accidental contact with parts under tension from the user.
	Class III luminaire, suitable for connection to very low voltage circuits.
	Solid particle and liquid ingress protection degree.
	Protection degree - Recessed part . Protection degree - Exposed part.
	Impact protection degree.
	ENEC European Norms Electrical Certification.

Particular symbols

	Weight of the single fixture
	Cable length
	Walk-over
	Driver-over safe
	Fixtures that have parameters below the minimum visibility threshold $PstLM \leq 1$ and $SVM \leq 0.4$ (IEC TR 61547-1 and IEC TR 63158).
	Casambi with accessories
	Casambi ready
	DMX on board
	DBS (Dynamic Beam Shaping) optic system

Light beam apertures

Optics	Optic description	from	to
NSP	Narrow Spot	5°	10°
SP	Spot	11°	21°
FL	Flood	22°	40°
MWFL	Medium Wide Flood	41°	50°
WFL	Wide Flood	51°	70°
VWFL	Very Wide Flood	71°	120°
WW	Wall Washer		
ASY	Asymmetric		
FW	Floor Washer		
ELL	Elliptical		
ELT	Elliptical Transversal		
AMB	Ambient		
OPL	Opal		
GRZ	Grazing		
UGR	UGR		
ZOOM	Zoom		
DBS	Dynamic Beam Shaping		

Note

- Please contact us for on demand treatments and versions.
- The performances reported on the products refer to the use of the recommended drivers.
- The drivers selected by Targetti make the fixtures "Safe Flicker".

