

# Projectors

# CAPSULE













**TARGETTI**

# CAPSULE



A range of adjustable projectors in two different sizes with a 60mm and a 70mm diameter. The projectors are equipped with an optical system with interchangeable lenses. Capsule 60 is equipped with a 39° flood lens with another lens included with it to obtain a SP 18° beam. Capsule 70 has a 33° emission and the second lens included with it to obtain a 18° beam. In both versions the light source is set back to ensure excellent visual comfort. The optical unit can be adjusted from 0° to 90° on the vertical plane and by 355° on the horizontal plane.


				
Track	Accent	Soft controlled	3000K	4000K
INSTALLATION	LIGHT		COLOUR TEMPERATURE	
				
On-Off	220-240V	White	Black	
CONTROL	POWER SUPPLY		FINISH	

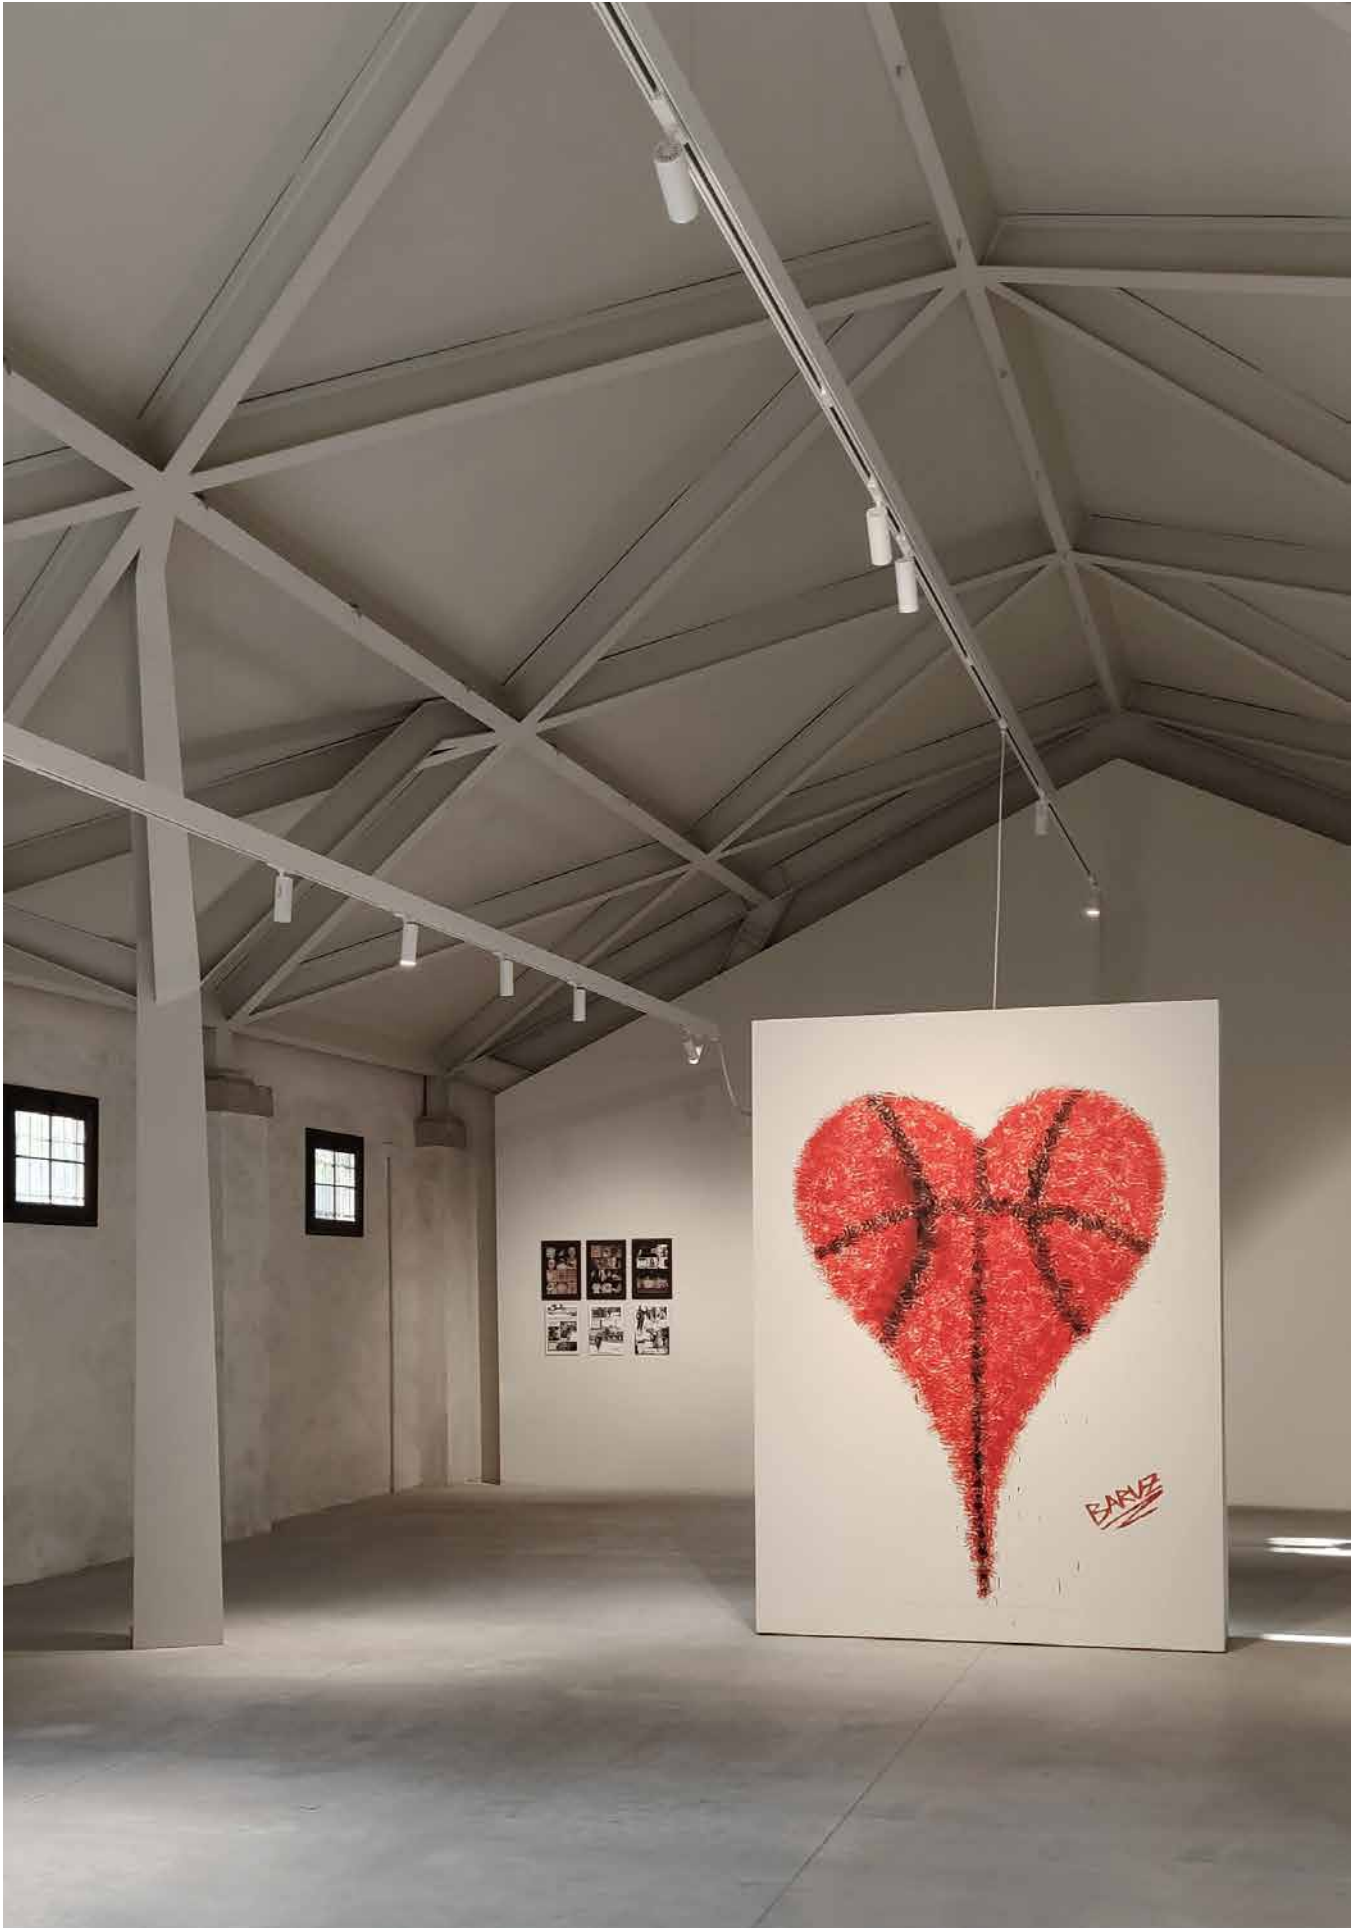




**CAPSULE Ø 70**  
Up to 109lm/W  
From 3449lm to 3609lm  
3000K - 4000K  
Ra90

**LENS**

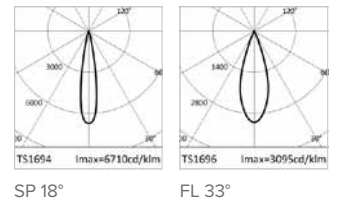


**CAPSULE Ø 60**  
Up to 105lm/W  
From 2062lm to 2125lm  
3000K - 4000K  
Ra90

**LENS**

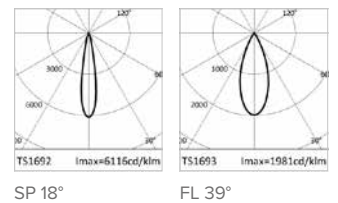


\* The luminous flux and efficiency (fixture) figures on this page refer to the 3000K LED.

**CAPSULE Ø 70**  
220-240Vac | Ra90 | Fixture flux 3000K from 3449lm to 3609lm



Optic	Colour	3000K	4000K
SP 18°, FL 33° 33W	○	1TD0005EL	1TD0006EL
	●	1TD0007EL	1TD0008EL

**CAPSULE Ø 60**  
220-240Vac | Ra90 | Fixture flux 3000K from 2062lm to 2125lm



Optic	Colour	3000K	4000K
SP 18°, FL 39° 20W	○	1TD0001EL	1TD0002EL
	●	1TD0003EL	1TD0004EL



**TARGETTI SANKEY Srl**  
Certificated ISO 9001 n° 9130. TAR1  
Certificated ISO 14001 n° IT319206

The Enec mark, ISO9001 and ISO14001 certifications and the CE marking all guarantee that the activities carried out internally in the company are governed and controlled by procedures which assure constant level of quality.

Accredited laboratory in accordance with ISO 17025.

#### **Requisites and information**

All fixtures of the Targetti collection have been designed and produced to comply with European Standard EN60598-1 relative to the safety requisite of light fixtures.



All fixtures comply with the following directives:

- EMC Directive 2014/30/EU
- LV Directive 2014/35/EU
- RoHS Directive 2011/65/EU

#### **Unless specified otherwise**

- all fixtures are supplied without lamps;
- all fixtures are sold separately;
- all measurements are expressed in millimeters;
- all fixtures at low voltage are supplied without transformer;
- For products in Class III performance is only guaranteed using the electronic power supplies and drivers indicated in the catalogue.



Targetti offers a five years warranty on the products that use LED light sources included in the Catalogues (unless otherwise specified).

The extension of guarantee does not apply to products with traditional light bulbs, to all the products for light management and control systems, both by Targetti and those by third parties, or to Targetti products fitted with 230V LED modules. For products fitted with traditional bulbs / LED bulbs, the warranty extension is valid only for the lighting product. The five years warranty is valid from the invoice date and covers any manufacturing and/or material defect found in products, if they are used in accordance with their intended use. The warranty terms are available on the Extension of guarantee.









#### **Consorzio ecolight**

Targetti Sankey Srl is a member of the Ecolight consortium that was set up in 2004 (D.Lgs. 49/2014) to comply with the provisions of the European Directive that was adopted in Italy as the European Directive 2012/19/EU for WEEE on managing, recovering and treating waste electrical and electronic equipment, used batteries and accumulators in compliance with all applicable legislation.










The colors of the products illustrated are reproduced as faithfully as possible compatibly with the technical limitations of the printed medium.

The company reserves the right to make changes to the production without notice. Reproduction of this catalogue or any part of it is prohibited. The products illustrated in this catalogue are covered by one or more Italian or international patents. The company will take legal action against any imitators.

## Icons legend

	Class I luminaire in which the protection against electrical shock is guaranteed by the connections of the conductive elements accessible to a protective conductor (earth connection).
	Luminaire in which the connection to a protective conductor (earth connection) guarantees the immunity to radio noises.
	Class II luminaire (double insulation), protected against the accidental contact with parts under tension from the user.
	Class III luminaire, suitable for connection to very low voltage circuits.
	Solid particle and liquid ingress protection degree.
	Protection degree - Recessed part . Protection degree - Exposed part.
	Impact protection degree.
	ENEC European Norms Electrical Certification.

## Particular symbols

	Weight of the single fixture
	Cable length
	Walk-over
	Driver-over safe
	Fixtures that have parameters below the minimum visibility threshold $PstLM \leq 1$ and $SVM \leq 0.4$ (IEC TR 61547-1 and IEC TR 63158).
	Casambi with accessories
	Casambi ready
	DMX on board
	DBS (Dynamic Beam Shaping) optic system

## Light beam apertures

Optics	Optic description	from	to
NSP	Narrow Spot	5°	10°
SP	Spot	11°	21°
FL	Flood	22°	40°
MWFL	Medium Wide Flood	41°	50°
WFL	Wide Flood	51°	70°
VWFL	Very Wide Flood	71°	120°
WW	Wall Washer		
ASY	Asymmetric		
FW	Floor Washer		
ELL	Elliptical		
ELT	Elliptical Transversal		
AMB	Ambient		
OPL	Opal		
GRZ	Grazing		
UGR	UGR		
ZOOM	Zoom		
DBS	Dynamic Beam Shaping		

### Note

- Please contact us for on demand treatments and versions.
- The performances reported on the products refer to the use of the recommended drivers.
- The drivers selected by Targetti make the fixtures "Safe Flicker".

